


Victaulic® Reducing Coupling

Style 750



1.0 PRODUCT DESCRIPTION

Available Sizes

- 2 x 1" through 10 x 8"/DN50 x DN25 through DN250 x DN200

Pipe Material

- Carbon steel
- For exceptions reference section 6.0 Notifications

NOTE

- For other pipe materials, contact Victaulic.

Maximum Working Pressure

- 500 psi/3447 kPa
- Working pressure dependent on material, wall thickness and size of pipe

Application

- Joins Original Groove System (OGS) roll grooved and cut grooved pipe, as well as OGS grooved fittings, valves and accessories
- Permits direct reduction on piping run
- Optional steel washer prevents telescoping of the smaller pipe inside the larger pipe during vertical system assembly

Pipe Preparation

- Cut or roll grooved in accordance with [publication 25.01](#): Victaulic Standard Groove Specifications.

2.0 CERTIFICATION/LISTINGS



EN 10311
CPR (EU)
No. 305/2011



BS EN 10311
CPR (UK)
2019 No. 465



NOTE

- Download [publication 10.01](#) for Fire Protection Certifications/Listings Reference Guide.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

3.0 SPECIFICATIONS – MATERIAL

Housing: Ductile iron conforming to ASTM A536, Grade 65-45-12. Ductile iron conforming to ASTM A395, Grade 65-45-15, is available upon special request.

Housing Coating: (specify choice)

- ☐ Standard: Orange enamel.
- ☐ Optional: Hot dipped galvanized conforming to ASTM A153.
- ☐ Optional: Contact Victaulic with your requirements.

Gasket: (specify choice¹)

☐ **Grade “E” EPDM**

EPDM (Green stripe color code). Temperature range –30°F to +230°F/–34°C to +110°C. May be specified for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. UL Classified in accordance with ANSI/NSF 61 for cold +73°F/+23°C and hot +180°F/+82°C potable water service and ANSI/NSF 372. **NOT COMPATIBLE FOR USE WITH PETROLEUM SERVICES OR STEAM SERVICES.**

☐ **Grade “T” Nitrile**

Nitrile (Orange stripe color code). Temperature range –20°F to +180°F/–29°C to +82°C. May be specified for oil related services, including air with oil vapor, this gasket may be specified for temperatures rated up to +180°F/+82°C. For water related services, this gasket may be specified for temperatures rated up to +150°F/+66°C. For oil free, dry air services, this gasket may be specified for temperatures rated up to +140°F/+60°C. **NOT COMPATIBLE FOR USE WITH HOT WATER SERVICES OR STEAM SERVICES.**

Others

- ☐ For alternate gasket selection, reference [publication 05.01](#): Victaulic Seal Selection Guide.

¹ Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to the latest [Victaulic Seal Selection Guide](#) for specific gasket service guidelines and for a listing of services which are not compatible.

Bolts/Nuts (specify choice²):


- ☐ Standard: Carbon steel oval neck track bolts meeting the mechanical property requirements of ASTM A449 (imperial) and ISO 898-1 Class 9.8 (M10-M16) Class 8.8 (M20 and greater). Carbon steel hex nuts meeting the mechanical property requirements of ASTM A563 Grade B (imperial – heavy hex nuts) and ASTM A563M Class 9 (metric – hex nuts). Track bolts and hex nuts are zinc electroplated per ASTM B633 ZN/FE5, finish Type III (imperial) or Type II (metric).
- ☐ Optional: Stainless steel oval neck track bolts meeting the mechanical property requirements of ASTM F593, Group 2 (316 stainless steel), condition CW. Stainless steel heavy nuts meeting the mechanical property requirements of ASTM F594, Group 2 (316 stainless steel), condition CW, with galling reducing coating.

Assembly Washer (optional): Galvanized carbon steel.

² Optional bolts/nuts are available in imperial size only

4.0 DIMENSIONS

Style 750 Reducing Coupling

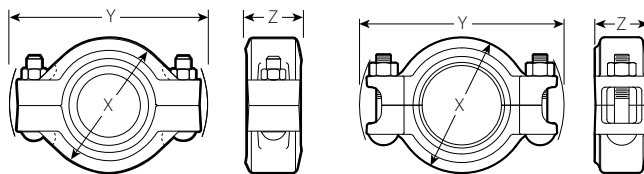

Size				Pipe End Separation ³	Deflect. From CL ³		Bolt/Nut		Dimensions			Weight
Nominal inches DN		Actual Outside Diameter inches mm		Allowable inches mm	Per Cplg. Degrees	Pipe in/ft mm/m	Qty.	Size inches mm	X inches mm	Y inches mm	Z inches mm	Approximate (Each) lb kg
2 DN50	x	1	1.315	0 - 0.07	0° - 57'	0.20 17	2	⅜ x 2	3.38 85	5.28 134	1.88 48	2.7
		DN25	33.7	0 - 1.8								1.2
		1 ½	1.900	0 - 0.07	0.20	2	⅜ x 2	3.38	5.28	1.88	2.0	
		DN40	48.3	0 - 1.8	0° - 57'	17			85	134	48	1.0
2 ½	x	2	2.375	0 - 0.07	0° - 47'	0.16 14	2	⅜ x 2	4.00 102	5.93 151	1.88 48	3.1
		DN50	60.3	0 - 1.8								1.4
DN65	x	2	3.000	0 - 0.07	0° - 47'	0.16 14	2	½ x 2 ¾	4.38 111	6.63 168	1.88 48	4.6
		DN50	76.1	0 - 1.8								2.1
3 DN80	x	2	3.500	0 - 0.07	0° - 39'	0.13 11	2	½ x 2 ¾	4.75 121	7.13 181	1.88 48	4.9
		DN50	88.9	60.3								0 - 1.8
		2 ½	2.875	0 - 0.07	0° - 39'	0.13	2	½ x 2 ¾	4.75	7.13	1.88	4.3
			73.0	0 - 1.8	11			121	181	48	2.0	
			3.00	0 - 0.07	0° - 39'	0.13	2	½ x 2 ¾	4.75	7.13	1.88	4.2
		DN65	76.1	0 - 1.8	11			121	181	48	1.9	
4 DN100	x	2	4.500	0 - 0.13	1° - 19'	0.28 25	2	⅝ x 3 ¼	6.25 159	8.90 226	2.25 57	8.1
		DN50	114.3	60.3								0 - 3.2
		2 ½	2.875	0 - 0.13	1° - 19'	0.28	2	⅝ x 3 ¼	6.25	8.90	2.25	8.6
			73.0	0 - 3.2	25			159	226	57	3.9	
			3.000	0 - 0.13	1° - 19'	0.28	2	⅝ x 3 ¼	6.25	8.90	2.25	6.9
		DN65	76.1	0 - 3.2	25			159	226	57	3.1	
		3	3.500	0 - 0.13	1° - 19'	0.28	2	⅝ x 3 ¼	6.00	8.90	2.25	6.7
		DN80	88.9	0 - 3.2	25			152	226	57	3.0	
5	x	4	5.563	0 - 0.13	1° - 3'	0.22 19	2	¾ x 4 ¼	7.18 182	10.70 272	2.13 54	11.2
		DN100	141.3	114.3								0 - 3.2
165.1	x	4	6.500	0 - 0.13	0° - 55'	0.19 16	2	¾ x 4 ¼	8.63 219	11.90 302	2.25 57	15.2
		DN100	165.1	114.3								0 - 3.2
6 DN150	x	4	6.625	0 - 0.13	0° - 52'	0.18 15	2	¾ x 4 ¼	8.63 219	11.90 302	2.25 57	16.7
		DN100	168.3	114.3								0 - 3.2
			5	5.563	0 - 0.13	0° - 52'	0.18	2	¾ x 4 ¼	8.31 211	11.90 302	2.25 57
8 DN200	x	165.1	8.625	6.500	0° - 38'	0.13 11	2	7⁄8 x 5	10.75 273	14.88 378	2.50 64	23.2
			219.1	165.1								0 - 3.2
			6	6.625	0 - 0.13	0° - 38'	0.13 11	2	7⁄8 x 5	10.81 275	14.88 378	2.50 64
		DN150	168.3	0 - 3.2								
10 DN250	x	8	10.750	8.625	0° - 25'	0.90 8	2	1 x 5 ½	13.12 333	17.26 438	2.62 67	31.4
		DN200	273.0	219.1								0 - 3.2

³ Allowable Pipe End Separation and Deflection figures show the maximum nominal range of movement available at each joint for standard roll grooved pipe. Figures for standard cut grooved pipe may be doubled. These figures are maximums; for design and installation purposes, these figures should be reduced by: 50% for 3/4 - 3 1/2" DN20 - DN90; and 25% for 4" DN100 and larger.

NOTE

- Metric thread size bolts are available (color-coded gold) for all coupling sizes upon request. Contact Victaulic for details.

5.0 PERFORMANCE

Style 750 Reducing Coupling

Size				Maximum Working Pressure ⁴	Maximum End Load ⁴
Nominal inches DN		Actual Outside Diameter inches mm			
2 DN50	x	1 DN25		350 2413	500 2225
		1 ½ DN40		350 2413	1000 4450
2 ½	x	2 DN50		500 3447	2215 9850
DN65	x	2 DN50		350 2413	1550 6900
3 DN80	x	2 DN50		350 2413	1550 6900
		2 ½		500 3447	3250 14460
		DN65		350 2413	2475 11010
4 DN100	x	2 DN50		350 2413	1550 6900
		2 ½		500 3447	4810 21400
		DN65		350 2413	2475 11014
5	x	4 DN100		350 2413	5565 24765
165.1	x	4 DN100		350 2413	5565 24765
6 DN150	x	4 DN100		350 2413	5565 24765
		5		500 3447	8500 37825
8 DN200	x	6 DN150		350 2413	11610 51645
		6		500 3447	12060 53645
10 DN250	x	8 DN200		350 2413	20450 90970

⁴ Working Pressure and End Load are total from all internal and external loads based on standard weight (ANSI) steel pipe standard roll or cut grooved in accordance with Victaulic specifications. Contact Victaulic for performance on other pipe and material. Maximum working pressure rating based on larger pipe size. Maximum end load rating based on smaller pipe size.

NOTES

- WARNING: FOR ONE-TIME FIELD USE ONLY the Maximum Joint Working Pressure may be increased to 1 ½ times the figures shown.
- For joint pressure ratings on additional carbon steel wall thicknesses see [publication 06.15](#).

5.1 PERFORMANCE

Flow Data - Head Loss

Equivalent lengths of standard weight steel pipe are shown in the tables. All data is based on water flowing at +60°F/+16°C.

Flow Reducing

Size	Equivalent Pipe Length
Nominal inches DN	Small Diameter ft m
2 DN50	1 DN25 5.9 1.8
	1 ½ DN40 2.0 0.6
2 ½	2 DN50 1.9 0.6
DN65	2 DN50 1.9 0.6
3 DN80	2 DN50 5.5 1.7
	2 ½ 3.8 1.2
	DN65 3.8 1.2
4 DN100	2 DN50 6.0 1.8
	2 ½ 6.0 1.8
	DN65 6.0 1.8
	3 DN80 6.0 1.8
5	4 DN100 3.0 0.9
165.1	4 DN100 6.0 1.8
6 DN150	4 DN100 6.0 1.8
	5 4.5 1.4
8 DN200	6 165.1 7.3 2.2
	6 DN150 7.3 2.2
10 DN250	8 DN200 8.7 2.7

Flow Expanding

Size	Equivalent Pipe Length
Nominal inches DN	Small Diameter ft m
1 DN25	2 DN50 2.7 0.8
1 ½ DN40	2 DN50 1.9 0.6
2 DN50	2 ½ 1.0 0.3
	DN65 1.0 0.3
	3 DN80 3.5 1.1
	4 DN100 3.0 0.9
2 ½	3 DN80 2.5 0.8
	4 DN100 3.0 0.9
DN65	3 DN80 2.5 0.8
	4 DN100 3.0 0.9
3 DN80	4 DN100 2.5 0.8
4 DN100	5 3.3 1.0
	165.1 4.6 1.4
	6 DN150 4.6 1.4
5	6 DN150 2.3 0.7
165.1	8 DN200 5.4 1.7
6 DN150	8 DN200 6.0 1.8
8 DN200	10 DN250 6.3 1.9

6.0 NOTIFICATIONS

WARNING

- Victaulic RX roll sets must be used when grooving light-wall/thin-wall stainless steel pipe for use with Victaulic Couplings.

Failure to use Victaulic RX roll sets when grooving light-wall/thin-wall stainless steel pipe may cause joint failure, resulting in serious personal injury and/or property damage.

WARNING



- Read and understand all instructions before attempting to install, remove, adjust, or maintain any Victaulic piping products.
 - Depressurize and drain the piping system before attempting to install, remove, adjust, or maintain any Victaulic piping products.
 - Wear safety glasses, hardhat, and foot protection.
 - Only No. 61 bull plugs shall be used with Style 750 reducing couplings in systems where a vacuum may develop.
- Failure to follow these instructions could result in death or serious personal injury and property damage.

NOTICE

- Victaulic does not recommend the use of any furnace butt-welded pipe with sizes NPS 2"/DN50 and smaller Victaulic gasketed joint products. This includes, but is not limited to, ASTM A53 Type F pipe.

7.0 REFERENCE MATERIALS

[05.01: Victaulic Seal Selection Guide](#)

[06.15: Victaulic Pressure Ratings and End Loads for Victaulic Couplings on Steel Pipe](#)

[10.01: Victaulic Products for Fire Protection Piping Systems - Regulatory Approval Reference Guide](#)

[25.01: Victaulic Original Groove System \(OGS\) Groove Specifications](#)

[26.01: Victaulic Design Data](#)

[29.01: Victaulic Terms and Conditions of Sale](#)

[I-100: Victaulic Field Installation Handbook](#)

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

Intellectual Property Rights

No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation

Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Trademarks

Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.