



No. 20 Tee



No. 10 Elbow

1.0 PRODUCT DESCRIPTION

Available Sizes

- $\frac{3}{4}$ – 24"/DN20 – DN600

Pipe Material

- Carbon steel

Maximum Working Pressure

- Pressure ratings for Victaulic standard fittings conform to the ratings of Victaulic Style 77 couplings (refer to [publication 06.04](#) for more information).

Application

- Connects pipe, provides change in direction and adapts sizes or components
- Supplied with Victaulic Original Groove System (OGS) grooves
- Exclusively for use with Victaulic couplings, valves, accessories and pipe which feature ends formed with the Victaulic OGS groove profile

NOTES

- For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information.
- These fittings are not intended for use with Victaulic plain end couplings. Intended for use only in grooved piping systems. When connecting wafer or lug type butterfly valves directly to Victaulic fittings using Style 741 or Style 743 flange adapters, be sure to check disc clearance dimensions with I.D. dimension of fitting.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

2.0 CERTIFICATION/LISTINGS



EN 10311
CPR (EU)
No. 305/2011

NOTES

- When supplied as “hot dip galvanized” the following fittings are UL Classified in accordance with ANSI/NSF 61 and for use on cold +86°F/+30°C potable water service and ANSI/NSF 372: No. 10 90° Elbow, No. 11 45° Elbow, No. 12 22 ½° Elbow, No. 13 11 ¼° Elbow, No. 100 90° Long Radius Elbow, No. 110 45° Long Radius Elbow, No. 20 Tee, No. 25 Tee with Grooved Branch, No. 30 45° Lateral, No. 60 Cap, No. 50 Concentric Reducers, No. 51 Eccentric Reducers.
- The following Victaulic fittings are VdS approved: No.10 90° Elbow, No.11 45° Elbow, No.20 Tee and No.60 Cap.
- The following Victaulic fittings are LPCB approved: No.10 90° Elbow, No.11 45° Elbow, No.12 22 ½° Elbow, No.13 11 ¼° Elbow, No.30 45° Lateral, No.30-R Reducing Lateral, No.100 Long Radius Elbow, No.110 Long Radius Elbow, No.20 Tee, No.35 Cross, No.60 Cap, No.25 Reducing Tee, No.33 True Wye, No.50 Concentric Reducer, No.51 Eccentric Reducer and No.29M Tee with Threaded Branch.
- The following Victaulic fittings are FM approved: No.10 90° Elbow, No.11 45° Elbow, No.12 22 ½° Elbow, No.13 11 ¼° Elbow, No.30 45° Lateral, No.100 Long Radius Elbow, No.20 Tee, No.35 Cross, No.60 Cap, No.25 Reducing Tee and No.50 Concentric Reducer.
- Download [publication 10.01](#) for Fire Protection Certifications/Listings Reference Guide to view which sizes of the fittings listed above have active fire protection approvals.

3.0 SPECIFICATIONS – MATERIAL

Fitting: (specify choice)

- ☐ Standard: Ductile iron conforming to ASTM A536, Grade 65-45-12.
- ☐ Optional: Segmentally welded carbon steel, standard wall, conforming to ASTM A53, Type E or S, Gr. B

Nipples: (specify choice)

- ☐ ¾ – 6"/DN20 – DN150: Carbon steel, Schedule 40, conforming to ASTM A53, Type E or S, Gr. B
- ☐ 8 – 12"/DN200 – DN300: Carbon steel, standard wall, conforming to ASTM A53, Type E or S, Gr. B

Flanged Adapter Nipples: (specify choice)

- ☐ Class 125 Flange: Cast iron conforming to ANSI B16.1
- ☐ Class 150 Flange: Carbon steel conforming to ANSI B16.5, raised or flat face
- ☐ Class 300 Flange: Carbon steel conforming to ANSI B16.5, raised or flat face

Fitting Coating: (specify choice)

- ☐ Standard: Orange enamel
- ☐ Optional: Hot dip galvanized and others. Some fittings supplied electroplated as standard – see product specifications

Flanged Adapter Nipple Coating: (specify choice)



- ☐ Standard: None (Unfinished)
- ☐ Optional: Orange enamel, hot dip galvanized and others

4.0 DIMENSIONS

Elbows

No. 10 90° Elbow

No. 11 45° Elbow





Size		No. 10 90° Elbow		No. 11 45° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	2.25 57	0.5 0.2	1.50 38	0.5 0.2
1 DN25	1.315 33.7	2.25 57	0.6 0.2	1.75 44	0.5 0.2
1 ¼ DN32	1.660 42.4	2.75 70	0.8 0.4	1.75 44	0.6 0.3
1 ½ DN40	1.900 48.3	2.75 70	1.0 0.5	1.75 44	0.8 0.4
2 DN50	2.375 60.3	3.25 83	1.8 0.8	2.00 51	1.3 0.6
2 ½	2.875 73.0	3.75 95	3.0 1.3	2.25 57	2.1 1.0
DN65	3.000 76.1	3.75 95	3.1 1.4	2.25 57	2.3 1.0
3 DN80	3.500 88.9	4.25 108	4.5 2.0	2.50 64	3.0 1.3
3 ½ DN90	4.000 101.6	4.50 114	5.6 2.5	2.75 70	4.0 1.8
	4.250 108.0	5.00 127	6.2 2.8	3.00 76	4.6 2.1
4 DN100	4.500 114.3	5.00 127	6.8 3.1	3.00 76	5.2 2.4
4 ½	5.000 127.0	5.00 127	8.6 3.9	3.13 79	5.9 2.7
	5.250 133.0	5.50 140	10.3 4.7	3.25 83	6.6 3.0
DN125	5.500 139.7	5.50 140	9.9 4.5	3.25 83	7.2 3.2
5	5.563 141.3	5.50 140	10.1 4.6	3.25 83	7.4 3.4
	6.000 152.4	6.50 (sw) 165	13.3 6.0	3.50 (sw) 89	9.5 4.3
	6.250 159.0	6.50 165	13.0 5.9	3.25 83	9.5 4.3
	6.500 165.1	6.50 165	15.5 7.0	3.50 89	9.7 4.4
6 DN150	6.625 168.3	6.50 165	15.3 6.9	3.50 89	10.2 4.6
200A	216.3	7.75 197	34.7 15.7	4.25 108	14.4 6.5

4.0 DIMENSIONS (CONTINUED)

Elbows

No. 10 90° Elbow

No. 11 45° Elbow



Size		No. 10 90° Elbow		No. 11 45° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
8	8.625	7.75	27.5	4.25	18.6
DN200	219.1	197	12.5	108	8.4
250A	267.4	9.00	67.8	4.75	28.1
		229	30.7	121	12.7
10	10.750	9.00	50.0	4.75	37.5
DN250	273.0	229	22.7	121	17.0
300A	318.5	10.00	73.5	5.25	41.3
		254	33.3	133	18.7
12	12.750	10.00	79.3	5.25	45.0
DN300	323.9	254	36.0	133	20.4
14 ¹	14.000	14.00	146.0	5.80	78.0
DN350	355.6	356	66.2	147	35.4
	14.843	14.88	168.0	6.15	82.0
	377.0	378	76.2	156	37.2
16 ¹	16.000	16.00	190.0	6.63	88.2
DN400	406.4	406	86.2	168	40.0
	16.772	16.75	216.0	6.95	98.1
	426.0	425	98.0	177	44.5
18 ¹	18.000	18.00	241.0	7.46	123.0
DN450	457.2	457	109.3	189	55.8
	18.898	18.90	291.0	7.83	123.2
	480.0	480	132.0	199	55.9
20 ¹	20.000	20.00	296.0	8.28	151.0
DN500	508.0	508	134.3	210	68.5
	20.866	20.88	355.0	8.64	179.0
	530.0	530	161.0	219	81.2
22	22.000	25.00	386.0	12.11	210.0
DN550	558.8	635	175.1	308	95.3
24 ¹	24.000	24.00	475.0	9.94	240.0
DN600	609.6	610	215.5	252	108.9
	24.803	24.75	545.0	10.27	275.4
	630.0	629	247.2	261	124.9
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 				

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

NOTE




- All fittings are ductile iron unless otherwise noted with an (sw).

4.0 DIMENSIONS (CONTINUED)

Elbows

No. 12 22 ½° Elbow

No. 13 11 ¼° Elbow



Size		No. 12 22 ½° Elbow		No. 12G (GSNK) 22 ½° Elbow		No. 13 11 ¼° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	1.63 (sw) 41	0.4 0.2	NA	NA	1.38 (sw) 35	0.4 0.2
1 DN25	1.315 33.7	1.63 (sw) 41	0.5 0.2	3.25 83	0.6 0.3	1.38 (sw) 35	0.4 0.2
1 ¼ DN32	1.660 42.4	1.75 44	0.8 0.4	NA	NA	1.38 35	0.6 0.3
1 ½ DN40	1.900 48.3	1.75 44	1.0 0.4	NA	NA	1.38 35	0.6 0.3
2 DN50	2.375 60.3	1.88 48	1.2 0.5	3.75 95	1.4 0.6	1.38 35	1.0 0.4
2 ½	2.875 73.0	2.00 (sw) 51	2.4 1.1	4.00 102	2.0 0.9	1.50 38	1.6 0.7
DN65	3.000 76.1	2.25 57	2.5 1.1	NA	NA	1.50 38	1.7 0.8
3 DN80	3.500 88.9	2.25 (sw) 57	3.1 1.4	4.50 114	3.1 1.4	1.50 38	2.0 0.9
3 ½ DN90	4.000 101.6	2.50 (sw) 64	4.0 1.8	NA	NA	1.75 (sw) 44	2.8 1.3
	4.250 108.0	2.88 (sw) 73	+	NA	NA	1.75 (sw) 44	+
4 DN100	4.500 114.3	2.88 73	4.8 2.2	5.25 133	4.8 2.2	1.75 44	3.3 1.5
4 ½	5.000 127.0	2.88 (sw) 73	+	NA	NA	1.88 (sw) 48	+
	5.250 133.0	2.88 (sw) 73	+	NA	NA	2.00 (sw) 51	+
DN125	5.500 139.7	2.88 73	6.3 2.9	NA	NA	2.00 51	4.6 2.1
5	5.563 141.3	2.88 (sw) 73	7.8 3.5	NA	NA	2.00 (sw) 51	5.0 2.3
	6.000 152.4	3.13 (sw) 79	+	NA	NA	2.00 (sw) 51	+
	6.250 159.0	3.13 (sw) 79	+	NA	NA	2.00 (sw) 51	+
	6.500 165.1	3.13 79	10.4 4.7	NA	NA	2.00 51	7.1 3.2
6 DN150	6.625 168.3	3.13 (sw) 79	12.2 5.5	6.25 159	12.2 5.5	2.00 51	6.4 2.9

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTE




- All fittings are ductile iron unless otherwise noted with an (sw).

4.0 DIMENSIONS (CONTINUED)

Elbows

No. 12 22 ½° Elbow

No. 13 11 ¼° Elbow



Size		No. 12 22 ½° Elbow		No. 12G (GSNK) 22 ½° Elbow		No. 13 11 ¼° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
8 DN200	8.625 219.1	3.88 (sw) 98	20.0 9.1	7.75 197	18.1 8.2	2.00 51	8.2 3.7
10 DN250	10.750 273.0	4.38 111	30.0 13.6	NA	NA	2.13 54	11.8 5.3
12 DN300	12.750 323.9	4.88 124	40.0 18.1	NA	NA	2.25 57	29.3 13.3
14 ¹ DN350	14.000 355.6	5.00 (sw) 127	46.0 20.9	NA	NA	3.50 (sw) 89	32.0 14.5
16 ¹ DN400	16.000 406.4	5.00 (sw) 127	58.0 26.3	NA	NA	4.00 (sw) 102	42.0 19.1
18 ¹ DN450	18.000 457.2	5.50 (sw) 140	65.0 29.5	NA	NA	4.50 (sw) 114	53.0 24.0
20 ¹ DN500	20.000 508.0	6.00 (sw) 152	78.6 35.7	NA	NA	5.00 (sw) 127	65.0 29.5
22 ¹ DN550	22.000 558.8	6.50 (sw) 165	125.0 56.7	NA	NA	5.50 (sw) 140	80.0 36.3
24 ¹ DN600	24.000 609.6	7.00 (sw) 178	140.0 63.5	NA	NA	6.00 (sw) 152	94.5 42.9
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 						

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTE



- All fittings are ductile iron unless otherwise noted with an (sw).

4.0 DIMENSIONS (CONTINUED)

Elbows

No. 100 90° Long Radius Elbow

No. 110 45° Long Radius Elbow



Size		No. 100 90° 1 1/2D Long Radius Elbow		No. 110 45° 1 1/2D Long Radius Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
3/4 DN20	1.050 26.9	2.50 (s) 64	0.4 0.2	1.75 (s) 44	0.4 0.2
1 DN25	1.315 33.7	2.88 (s) 73	0.8 0.4	2.25 (s) 57	0.6 0.3
1 1/4 DN32	1.660 42.4	3.25 (s) 83	1.1 0.5	2.38 (s) 60	0.9 0.4
1 1/2 DN40	1.900 48.3	3.63 (s) 92	2.2 1.0	2.50 (s) 64	1.1 0.5
2 DN50	2.375 60.3	4.38 111	2.6 1.2	2.75 70	1.9 0.9
2 1/2	2.875 73.0	5.13 130	3.4 1.5	3.13 (s) 79	3.0 1.4
3 DN80	3.500 88.9	5.88 149	6.0 2.7	3.38 86	3.8 1.7
3 1/2 DN90	4.000 101.6	6.63 (s) 168	8.7 3.9	3.63 (s) 92	5.6 2.5
4 DN100	4.500 114.3	7.50 191	10.8 4.9	4.00 102	7.4 3.4
5	5.563 141.3	9.25 235	18.0 8.2	4.25 108	14.8 6.7
	6.500 165.1	10.75 273	25.8 11.7	5.50 140	15.8 7.2
6 DN150	6.625 168.3	10.75 273	30.4 13.8	5.38 137	16.7 7.6
8 DN200	8.625 219.1	14.25 362	68.5 31.1	7.25 184	36.0 16.3
10 DN250	10.750 273.0	15.00 381	81.6 37.0	6.25 159	40.1 18.2
12 DN300	12.750 323.9	18.00 457	138.0 62.6	7.50 191	69.6 31.6
14 ¹ DN350	14.000 355.6	21.00 533	222.7 101.0	8.75 222	112.4 51.0
16 ¹ DN400	16.000 406.4	24.00 610	302.0 137.0	10.00 254	158.7 72.0
18 ¹ DN450	18.000 457.2	27.00 686	421.8 191.3	11.25 286	224.9 102.0
20 ¹ DN500	20.000 508.0	30.00 762	498.2 226.0	12.50 318	246.9 112.0
22 ¹ DN550	22.000 558.8	36.00 (s) 914	400.0 181.4	16.50 (s) 419	205.0 93.0
24 ¹ DN600	24.000 609.6	36.00 914	765.0 347.0	15.00 381	370.4 168.0
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 				

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel


NOTE

- All fittings are ductile iron unless otherwise noted with an (s).

4.1 DIMENSIONS

No. 10-DR

90° Drain Elbow



Size		No. 10-DR 90° Drain Elbow					Weight
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	ØB inches mm	G inches mm	H inches mm	Drain Tap NPT inches mm	Approx. (Each) lb kg
2½	2.875 73.0	3.75 95	1.81 46	2.75 70	1.68 43	1 25	3.5 1.6
3 DN80	3.500 88.9	4.25 108	1.81 46	2.75 70	2.13 54	1 25	4.8 2.2
4 DN100	4.500 114.3	5.00 127	1.81 46	2.75 70	2.63 67	1 25	7.8 3.5
6 DN150	6.625 168.3	6.50 165	1.81 46	2.75 70	3.65 93	1 25	18.1 8.2
8 DN200	8.625 219.1	7.75 197	1.81 46	2.75 70	4.50 114	1 25	29.6 13.4

NOTE


- ISO 7-R thread options are available; contact Victaulic.

4.2 DIMENSIONS

Reducing Base Support Elbow

No. R-10G

No. R-10F

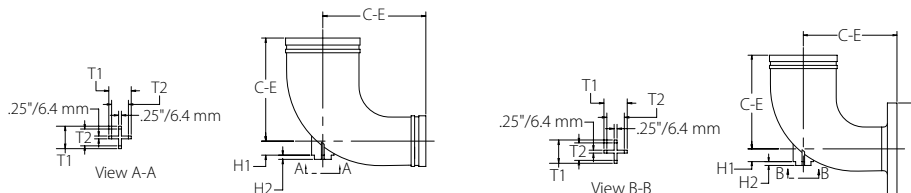

Size		No. R-10G 90° Reducing Base Support Elbow Groove x Groove							No. R-10F 90° Reducing Base Support Elbow Groove x Class 150 Flange*						
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	H1 inches mm	H2 inches mm	T1 inches mm	T2 inches mm	Approx. Weight (Each) lb kg		C to E inches mm	ØF inches mm	H1 inches mm	H2 inches mm	T1 inches mm	T2 inches mm	Approx. Weight (Each) lb kg
6 x 4 DN150 x DN100	6.625 x 4.500 168.3 x 114.3	9.19 233	1.25 32	0.38 10	2.00 51	1.50 38	33.0 15.0		9.19 233	9.00 229	1.25 32	0.38 10	2.00 51	1.50 38	46.0 20.9
8 x 6 DN200 x DN150	8.625 x 6.625 219.1 x 168.3	10.50 267	2.13 54	0.38 10	2.00 51	1.50 38	51.0 23.1		10.50 267	11.00 279	2.13 54	0.38 10	2.00 51	1.50 38	70.0 31.8
10 x 8 DN250 x DN200	10.750 x 8.625 273.0 x 219.1	12.00 305	2.38 60	0.38 10	2.00 51	1.50 38	88.0 39.9		12.00 305	13.50 343	2.38 60	0.38 10	2.00 51	1.50 38	118.0 53.5

* Contact Victaulic for additional flange end options.



For long radius base support elbow options, please refer to [publication 07.13](#).

4.3 DIMENSIONS

Adapter Elbow

No. 18 90° Adapter Elbow

No. 19 45° Adapter Elbow



Size		No. 18 90° Adapter Elbow Groove x Male Thread ¹			No. 19 45° Adapter Elbow Groove x Male Thread ¹		
Nominal inches DN	Actual Outside Diameter inches mm	C to GE inches mm	C to TE inches mm	Approx. Weight (Each) lb kg	C to GE inches mm	C to TE inches mm	Approx. Weight (Each) lb kg
3/4 DN20	1.050 26.9	2.25 57	2.25 57	0.5 0.2	1.50 38	1.50 38	0.5 0.2
1 DN25	1.315 33.7	2.25 57	2.25 57	0.6 0.3	NA	NA	NA
1 1/4 DN32	1.660 42.4	2.75 70	2.75 70	1.2 0.5	NA	NA	NA
1 1/2 DN40	1.900 48.3	2.75 70	2.75 70	1.4 0.7	1.75 44	1.75 44	0.9 0.4
2 DN50	2.375 60.3	3.25 83	4.25 108	2.5 1.1	NA	NA	NA
2 1/2 DN65	2.875 73.0	3.75 95	3.75 95	3.7 1.7	2.25 57	2.25 57	2.3 1.0
3 DN80	3.500 88.9	4.25 108	6.00 152	6.6 3.0	2.50 64	4.25 108	5.0 2.3
4 DN100	4.500 114.3	5.00 127	7.25 184	10.0 4.5	NA	NA	NA
6 DN150	6.625 168.3	6.50 165	6.50 165	19.0 8.6	3.50 89	3.50 89	10.8 4.9

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.



NA = Not Available

4.4 DIMENSIONS

Tees, Crosses and True Wyes

No. 20

No. 29M



Size		No. 20 Tee		No. 29M Tee Groove x Male Thread ² Branch		
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to GE inches mm	C to TE inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	2.25 57	0.8 0.4	2.25 (sw) 57	2.25 (sw) 57	0.6 0.3
1 DN25	1.315 33.7	2.25 57	0.9 0.4	2.25 (sw) 57	2.25 (sw) 57	0.9 0.4
1¼ DN32	1.660 42.4	2.75 70	1.5 0.7	2.75 70	2.75 70	1.6 0.7
1½ DN40	1.900 48.3	2.75 70	1.7 0.8	2.75 70	2.75 70	1.8 0.8
2 DN50	2.375 60.3	3.25 83	2.8 1.3	3.25 83	4.25 108	3.5 1.6
2½	2.875 73.0	3.75 95	4.8 2.2	3.75 (sw) 95	3.75 (sw) 95	4.3 2.0
DN65	3.000 76.1	3.75 95	5.3 2.4	3.75 (sw) 95	3.75 (sw) 95	5.2 2.4
3 DN80	3.500 88.9	4.25 108	6.4 2.9	4.25 (sw) 108	4.25 (sw) 108	7.2 3.3
3½ DN90	4.000 101.6	4.50 (sw) 114	7.9 3.6	4.50 (sw) 114	4.50 (sw) 114	7.9 3.6
	4.250 108.0	5.00 127	12.0 5.4	5.00 (sw) 127	5.00 (sw) 127	15.5 7.0
4 DN100	4.500 114.3	5.00 127	11.3 5.1	5.00 127	7.25 184	16.3 7.4
4½	5.000 127.0	5.25 (sw) 133	15.0 6.8	5.25 (sw) 133	5.25 (sw) 133	15.0 6.8
	5.250 133.0	5.50 140	16.2 7.3	5.50 (sw) 140	5.50 (sw) 140	17.8 8.1
DN125	5.500 139.7	5.50 140	17.8 8.1	5.50 (sw) 140	5.50 (sw) 140	17.8 8.1
5	5.563 141.3	5.50 140	17.8 8.1	5.50 (sw) 140	5.50 (sw) 140	24.0 10.9
	6.000 152.4	6.50 (sw) 165	+	6.50 (sw) 165	6.50 (sw) 165	25.7 11.7
	6.250 159.0	6.50 (sw) 165	+	6.50 (sw) 165	6.50 (sw) 165	27.1 12.3
	6.500 165.1	6.50 165	25.0 11.3	6.50 (sw) 165	6.50 (sw) 165	28.0 12.7
6 DN150	6.625 168.3	6.50 165	25.7 11.7	6.50 (sw) 165	6.50 (sw) 165	33.0 15.0
200A	216.3	7.75 197	43.3 19.6	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES



- All fittings are ductile iron unless otherwise noted with an (sw).

4.3 DIMENSIONS (CONTINUED)

Tees, Crosses and True Wyes

No. 20

No. 29M



Size		No. 20 Tee		No. 29M Tee Groove x Male Thread ² Branch		
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to GE inches mm	C to TE inches mm	Approx. Weight (Each) lb kg
8 DN200	8.625 219.1	7.75 197	49.5 22.5	7.75 (sw) 197	7.75 (sw) 197	47.6 21.6
250A	267.4	9.00 229	66.0 29.9	NA	NA	NA
10 DN250	10.750 273.0	9.00 229	72.4 32.8	9.00 (sw) 229	9.00 (sw) 229	99.0 44.9
300A	318.5	10.00 254	95.0 43.1	NA	NA	NA
12 DN300	12.750 323.9	10.00 254	107.2 48.6	10.00 (sw) 254	10.00 (sw) 254	133.0 60.3
14 ¹ DN350	14.000 355.6	11.00 (sw) 279	150.0 68.0	11.00 (sw) 279	11.00 (sw) 279	+
	14.843 377.0	11.50 292	159.3 72.3	NA	NA	NA
16 ¹ DN400	16.000 406.4	12.00 (sw) 305	188.0 85.3	12.00 (sw) 305	12.00 (sw) 305	+
	16.772 426.0	13.00 330	211.6 96.0	NA	NA	NA
18 ¹ DN450	18.000 457.2	15.50 (sw) 394	200.0 90.7	15.50 (sw) 394	15.50 (sw) 394	+
	18.898 480.0	14.57 370	211.6 96.0	NA	NA	NA
20 ¹ DN500	20.000 508.0	17.25 (sw) 438	339.0 153.8	17.25 (sw) 438	17.25 (sw) 438	+
	20.866 530.0	15.39 391	382.0 173.3	NA	NA	NA
22 ¹ DN550	22.000 558.8	19.00 (sw) 483	468.0 212.3	19.00 (sw) 483	19.00 (sw) 483	+
24 ¹ DN600	24.000 609.6	20.00 (sw) 508	592.0 268.5	20.00 (sw) 508	20.00 (sw) 508	+
	24.803 630.0	17.37 441	502.0 227.7	NA	NA	NA
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 					

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES



- All fittings are ductile iron unless otherwise noted with an (sw).

4.4 DIMENSIONS

Tees, Crosses and True Wyes

No. 33

No. 35



Size		No. 33 True Wye			No. 35 Cross	
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	2.25 (sw) 57	2.00 (sw) 51	0.8 0.4	2.25 (sw) 57	0.9 0.4
1 DN25	1.315 33.7	2.25 (sw) 57	2.25 (sw) 57	1.1 0.5	2.25 (sw) 57	1.3 0.6
1 ¼ DN32	1.660 42.4	2.75 (sw) 70	2.50 (sw) 64	1.5 0.7	2.75 (sw) 70	2.1 1.0
1 ½ DN40	1.900 48.3	2.75 (sw) 70	2.75 (sw) 70	1.8 0.8	2.75 (sw) 70	2.5 1.1
2 DN50	2.375 60.3	3.25 (sw) 83	2.75 (sw) 70	2.5 1.1	3.25 83	4.0 1.8
2 ½	2.875 73.0	3.75 (sw) 95	3.00 (sw) 76	5.1 2.3	3.75 95	6.1 2.8
DN65	3.000 76.1	3.75 (sw) 95	3.25 (sw) 83	5.5 2.5	3.75 95	7.8 3.5
3 DN80	3.500 88.9	4.25 (sw) 108	3.25 (sw) 83	6.1 2.8	4.25 108	11.8 5.4
3 ½ DN90	4.000 101.6	4.50 (sw) 114	3.50 (sw) 89	9.6 4.4	4.50 (sw) 114	11.5 5.2
	4.250 108.0	5.00 (sw) 127	3.75 (sw) 95	9.7 4.4	5.00 127	18.4 8.3
4 DN100	4.500 114.3	5.00 127	3.75 95	10.0 4.5	5.00 127	15.8 7.2
4 ½	5.000 127.0	5.25 (sw) 133	4.00 (sw) 102	12.5 5.7	5.25 (sw) 133	18.5 8.4
	5.250 133.0	5.50 (sw) 140	4.00 (sw) 102	13.8 6.2	5.50 (sw) 140	19.0 8.6
DN125	5.500 139.7	5.50 (sw) 140	4.00 (sw) 102	15.0 6.8	5.50 (sw) 140	19.5 8.8
5	5.563 141.3	5.50 (sw) 140	4.00 (sw) 102	15.0 6.8	5.50 140	28.6 13.0
	6.000 152.4	6.50 (sw) 165	4.50 (sw) 114	17.5 7.9	6.50 (sw) 165	22.0 10.0
	6.250 159.0	6.50 (sw) 165	4.50 (sw) 114	19.9 9.0	6.50 165	41.4 18.8
	6.500 165.1	6.50 (sw) 165	4.50 (sw) 114	21.5 9.8	6.50 165	44.0 20.0
6 DN150	6.625 168.3	6.50 (sw) 165	4.50 (sw) 114	22.3 10.1	6.50 165	46.0 20.9
8 DN200	8.625 219.1	7.75 (sw) 197	6.00 (sw) 152	36.0 16.3	7.75 (sw) 197	48.0 21.8

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

NOTE



- All fittings are ductile iron unless otherwise noted with an (sw).

4.4 DIMENSIONS (CONTINUED)

Tees, Crosses and True Wyes

No. 33

No. 35



Size		No. 33 True Wye			No. 35 Cross	
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
10 DN250	10.750 273.0	9.00 (sw) 229	6.50 (sw) 165	54.5 24.7	9.00 (sw) 229	70.0 31.8
12 DN300	12.750 323.9	10.00 (sw) 254	7.00 (sw) 178	80.0 36.3	10.00 (sw) 254	110.0 49.9
14 ¹ DN350	14.000 355.6	11.00 (sw) 279	7.50 (sw) 191	134.2 60.9	11.00 (sw) 279	198.0 89.8
16 ¹ DN400	16.000 406.4	12.00 (sw) 305	8.00 (sw) 203	167.0 75.7	12.00 (sw) 305	250.0 113.4
18 ¹ DN450	18.000 457.2	15.50 (sw) 394	8.50 (sw) 216	180.0 81.6	15.50 (sw) 394	350.0 158.8
20 ¹ DN500	20.000 508.0	17.25 (sw) 438	9.00 (sw) 229	200.0 90.7	17.25 (sw) 438	452.0 205.0
22 ¹ DN550	22.000 558.8	19.00 (sw) 483	9.50 (sw) 241	225.0 102.1	19.00 (sw) 483	624.0 283.0
24 ¹ DN600	24.000 609.6	20.00 (sw) 508	10.00 (sw) 254	250.0 113.4	20.00 (sw) 508	795.0 360.6
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 					

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

NOTE

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

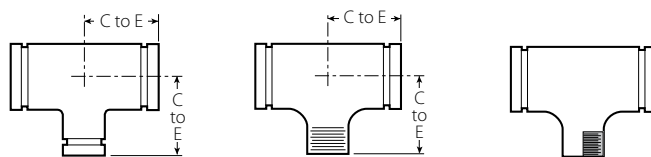

Size				No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN			Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
1 DN25	x	1 DN25	x 1.315 33.7	1.315 33.7	x 1.050 26.9	2.25 (sw) 57	0.8 0.4	2.25 (sw) 57	0.8 0.4
1 1/4 DN32	x	1 1/4 DN32	x 1.660 42.4	1.660 42.4	x 1.050 26.9	2.75 (sw) 70	1.0 0.5	2.75 (sw) 70	1.0 0.5
		1 DN25			1.315 33.7	2.75 (sw) 70	1.3 0.6	2.75 (sw) 70	1.5 0.7
1 1/2 DN40	x	1 1/2 DN40	x 1.900 48.3	1.900 48.3	x 1.050 26.9	2.75 (sw) 70	1.5 0.7	2.75 (sw) 70	1.5 0.7
		1 DN25			1.315 33.7	2.75 (sw) 70	1.5 0.7	2.75 (sw) 70	1.8 0.8
		1 1/4 DN32			1.660 42.4	2.75 (sw) 70	2.1 1.0	2.75 (sw) 70	1.7 0.8
2 DN50	x	2 DN50	x 2.375 60.3	2.375 60.3	x 1.050 26.9	3.25 83	2.5 1.1	3.25 83	2.5 1.1
		1 DN25			1.315 33.7	3.25 83	2.7 1.2	3.25 83	2.7 1.2
		1 1/4 DN32			1.660 42.4	3.25 (sw) 83	2.3 1.0	3.25 (sw) 83	2.3 1.0
		1 1/2 DN40			1.900 48.3	3.25 83	3.2 1.5	3.25 83	3.2 1.5
2 1/2 DN65	x	2 1/2 DN65	x 2.875 73.0	2.875 73.0	x 1.050 26.9	3.75 (sw) 95	3.9 1.8	3.75 (sw) 95	3.0 1.4
		1 DN25			1.315 33.7	3.75 95	3.8 1.7	3.75 95	3.8 1.7
		1 1/4 DN32			1.660 42.4	3.75 95	4.0 1.8	3.75 95	4.0 1.8
		1 1/2 DN40			1.900 48.3	3.75 95	4.8 2.2	3.75 95	4.8 2.2
		2 DN50			2.375 60.3	3.75 95	4.5 2.0	3.75 95	4.5 2.0
DN65	x	DN65	x 3.000 76.1	3.000 76.1	x 1.050 26.9	3.75 (sw) 95	+	3.75 (sw) 95	+
		1 DN25			1.315 33.7	3.75 (sw) 95	+	3.75 (sw) 95	+
		1 1/4 DN32			1.660 42.4	3.75 (sw) 95	+	3.75 (sw) 95	+
		1 1/2 DN40			1.900 48.3	3.75 (sw) 95	+	3.75 (sw) 95	+
		2 DN50			2.375 60.3	3.75 95	4.6 2.1	3.75 95	4.6 2.1

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

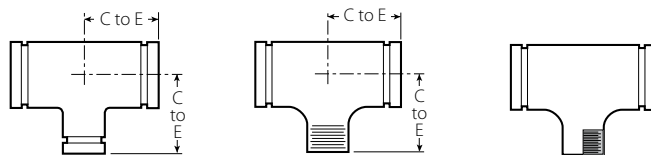

Size							No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch									
Nominal inches DN				Actual Outside Diameter inches mm			C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg								
3 DN80	x	3 DN80	x ¾ DN20	3.500 88.9	x	3.500 88.9	1.050 26.9	4.25 (sw) 108	5.7 2.6	4.25 (sw) 108	5.7 2.6	NA	NA							
							1.315 33.7	4.25 108	6.0 2.7	4.25 108	6.0 2.7	NA	NA							
							1.660 42.4	4.25 108	6.0 2.7	4.25 108	6.3 2.9	NA	NA							
							1.900 48.3	4.25 108	6.6 3.0	4.25 108	6.6 3.0	NA	NA							
							2.375 60.3	4.25 108	6.2 2.8	4.25 108	6.2 2.8	4.25 108	6.2 2.8							
							2.875 73.0	4.25 108	6.6 3.0	4.25 108	6.6 3.0	NA	NA							
							3.000 76.1	4.25 108	6.8 3.1	4.25 108	11.6 5.3	NA	NA							
							3 ½ DN90	x	3 ½ DN90	x ¾ DN20	4.000 101.6	x	4.000 101.6	1.050 26.9	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA
														1.315 33.7	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA
1.660 42.4	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA														
1.900 48.3	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA														
2.375 60.3	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA														
2.875 73.0	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA														
3.500 88.9	4.50 (sw) 114	+	4.50 (sw) 114	+	NA	NA														
				4.250 108.0	x	4.250 108.0								1.050 26.9	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+
														1.315 33.7	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+
							1.660 42.4	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+							
							1.900 48.3	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+							
							2.375 60.3	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+							
							3.000 76.1	5.00 (sw) 127	+	5.00 (sw) 127	+	5.00 (sw) 127	+							
							3.500 88.9	5.00 127	9.5 4.3	5.00 (sw) 127	+	NA	NA							

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

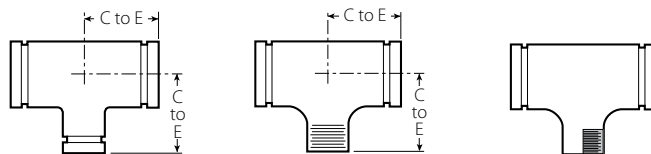

Size			No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN	Actual Outside Diameter inches mm		C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
4 x 4 x ¾ DN100 x DN100 x DN20	4.500 114.3	4.500 114.3	1.050 26.9	5.00 (sw) 127	8.0 3.6	5.00 (sw) 127	9.3 4.2	NA
1 DN25			1.315 33.7	5.00 127	9.1 4.1	5.00 127	9.1 4.1	NA
1 ¼ DN32			1.660 42.4	5.00 (sw) 127	8.9 4.0	5.00 (sw) 127	10.0 4.5	NA
1 ½ DN40			1.900 48.3	5.00 127	10.2 4.6	5.00 127	10.2 4.6	NA
2 DN50			2.375 60.3	5.00 127	11.2 5.1	5.00 127	11.2 5.1	NA
2 ½			2.875 73.0	5.00 127	11.5 5.2	5.00 127	11.5 5.2	NA
3 DN65			3.000 76.1	5.00 127	10.3 4.7	5.00 127	10.3 4.7	NA
3 DN80			3.500 88.9	5.00 127	11.6 5.3	5.00 127	11.6 5.3	NA
	5.250 133.0	5.250 133.0	1.050 26.9	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			1.315 33.7	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			1.660 42.4	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			1.900 48.3	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			2.375 60.3	5.50 (sw) 140	+	5.50 (sw) 140	+	NA
			3.000 76.1	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			3.500 88.9	5.50 (sw) 140	+	5.50 (sw) 140	+	5.50 (sw) 140
			4.250 108.0	5.50 140	12.9 5.9	5.50 (sw) 140	+	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

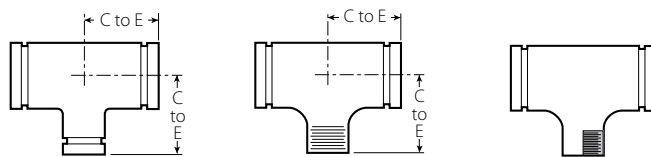

Size				No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN			Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
DN125	x	DN125	x	5.500 139.7	x	5.500 139.7	x	1.050 26.9	5.50 (sw) 140
		3/4 DN20							+
		1 DN25							+
		1 1/4 DN32							+
		1 1/2 DN40							+
		2 DN50							+
		DN65							+
		3 DN80							+
									+
		4 DN100							+
5	x	5	x	5.563 141.3	x	5.563 141.3	x	1.050 26.9	5.50 (sw) 140
		3/4 DN20							+
		1 DN25							+
		1 1/4 DN32							+
		1 1/2 DN40							+
		2 DN50							+
		2 1/2							+
		3 DN80							+
		4 DN100							+

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details


NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).

4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25
No. 29T
No. 29F

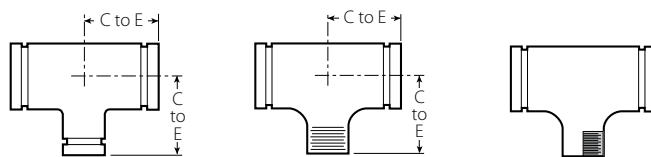

Size				No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN	Actual Outside Diameter inches mm			C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
	6.000 152.4	x	6.000 152.4	1.050 26.9	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				1.315 33.7	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				1.660 42.4	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				1.900 48.3	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				2.375 60.3	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				3.000 76.1	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				3.500 88.9	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				4.250 108.0	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				4.500 114.3	6.50 (sw) 165	+	6.50 (sw) 165	+	NA
				5.250 133.0	6.50 (sw) 165	+	6.50 (sw) 165	+	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

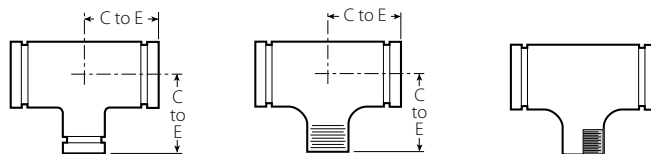

Size				No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN	Actual Outside Diameter			C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
6.250 159.0	x	6.250 159.0	1.050 26.9	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			1.315 33.7	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			1.660 42.4	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			1.900 48.3	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			2.375 60.3	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			3.000 76.1	6.50 (sw) 165	+	6.50 (sw) 165	+	6.50 (sw) 165	+
			3.500 88.9	6.50 165	18.5 8.4	6.50 (sw) 165	+	NA	NA
			4.250 108.0	6.50 165	18.5 8.4	6.50 (sw) 165	+	NA	NA
			4.500 114.3	6.50 165	12.1 5.5	6.50 (sw) 165	+	NA	NA
			5.250 133.0	6.50 165	19.0 8.6	6.50 (sw) 165	+	NA	NA
6.500 165.1	x	6.500 165.1	1.050 26.9	6.50 (sw) 165	+	6.50 (sw) 165	+	NA	NA
			1.315 33.7	6.50 (sw) 165	10.8 4.9	6.50 (sw) 165	10.8 4.9	NA	NA
			1.660 42.4	6.50 (sw) 165	11.0 5.0	6.50 (sw) 165	11.0 5.0	NA	NA
			1.900 48.3	6.50 (sw) 165	11.3 5.1	6.50 (sw) 165	11.3 5.1	NA	NA
			2.375 60.3	6.50 165	18.9 8.6	6.50 165	18.9 8.6	NA	NA
			3.000 76.1	6.50 165	20.0 9.1	6.50 (sw) 165	+	NA	NA
			3.500 88.9	6.50 165	24.3 11.0	6.50 (sw) 165	+	NA	NA
			4.500 114.3	6.50 165	23.8 10.8	6.50 (sw) 165	+	NA	NA
			5.500 139.7	6.50 165	26.0 11.8	6.50 (sw) 165	+	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

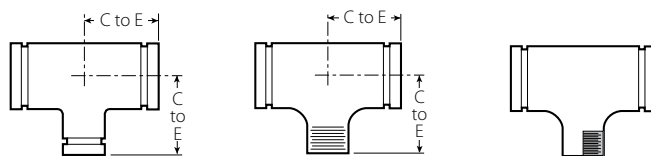

Size						No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch									
Nominal inches DN			Actual Outside Diameter inches mm			C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg								
6 DN150	x	6 DN150	x	6.625 168.3	x	1.050 26.9	6.50 (sw) 165	+	6.50 (sw) 165	+	NA	NA							
		1 DN25																	
		1 ¼ DN32																	
		1 ½ DN40																	
		2 DN50																	
		2 ½																	
		DN65																	
		3 DN80																	
		4 DN100																	
		DN125																	
		5																	
	200A	x					200A	x	216.3	x	216.3	x	76.3	7.75 (sw) 197	+	NA	NA	NA	NA
							100A												
		165A																	

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

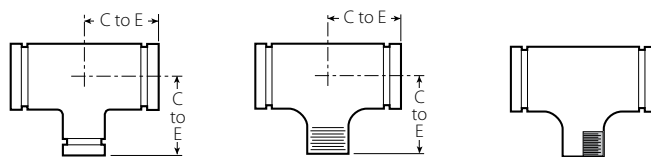

Size			No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN		Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
8 x 8 x ¾ DN200 x DN200 x DN20		8.625 x 8.625 x 1.050 219.1 x 219.1 x 26.9	7.75 (sw) 197	+	7.75 (sw) 197	+	7.75 (sw) 197	+
	1 DN25		7.75 (sw) 197	+	7.75 (sw) 197	+	7.80 (sw) 198	+
	1 ¼ DN32		7.75 (sw) 197	+	7.75 (sw) 197	+	7.80 (sw) 198	+
	1 ½ DN40		7.75 (sw) 197	33.0 15.0	7.75 (sw) 197	37.7 17.1	7.80 (sw) 198	+
	2 DN50		7.75 (sw) 197	33.5 15.2	7.75 (sw) 197	33.5 15.2	NA	NA
	2 ½		7.75 (sw) 197	37.3 16.9	7.75 (sw) 197	34.0 15.4	NA	NA
			7.75 (sw) 197	37.5 17.0	NA	NA	7.80 (sw) 198	+
	DN65		7.75 (sw) 197	37.5 17.0	7.75 (sw) 197	33.6 15.2	NA	NA
	3 DN80		7.75 (sw) 197	48.9 22.2	NA	NA	NA	NA
			7.75 (sw) 197	42.9 19.5	7.75 (sw) 197	35.0 15.9	NA	NA
	4 DN100		9.02 229	54.6 24.8	7.75 (sw) 197	+	NA	NA
			7.75 (sw) 197	+	NA	NA	NA	NA
	DN125		7.75 (sw) 197	37.0 16.8	7.75 (sw) 197	37.0 16.8	NA	NA
	5		7.75 (sw) 197	51.6 23.4	7.75 (sw) 197	+	NA	NA
			7.75 (sw) 197	43.2 19.6	7.75 (sw) 197	+	NA	NA
	6 DN150		7.75 (sw) 197	48.5 22.0	7.75 (sw) 197	43.0 19.5	NA	NA
			9.00 229	68.4 31.0	NA	NA	NA	NA
250A x 250A x 4 DN100 x DN100 x 4		267.4 x 267.4 x 4.5 267.4 x 267.4 x 114.3	9.00 (sw) 229	+	NA	NA	NA	NA
	125A		9.00 (sw) 229	+	NA	NA	NA	NA
	200A		9.00 229	82.0 37.2	NA	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

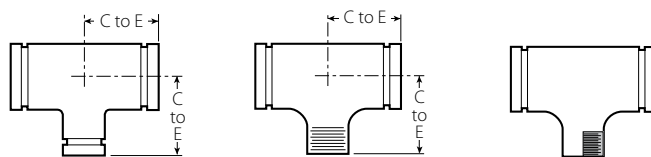

Size									No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch		
Nominal inches DN				Actual Outside Diameter inches mm				C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg		
10 DN250	x	10 DN250	x	¾ DN20	10.750 273.0	x	1.050 26.9	9.00 (sw) 229	+	9.00 (sw) 229	+	NA	NA		
				1 DN25			1.315 33.7	9.00 (sw) 229	+	9.00 (sw) 229	+	NA	NA		
				1 ¼ DN32			1.660 42.4	9.00 (sw) 229	+	9.00 (sw) 229	+	NA	NA		
				1 ½ DN40			1.900 48.3	9.00 (sw) 229	57.0 25.9	9.00 (sw) 229	57.0 25.9	NA	NA		
				2 DN50			2.375 60.3	9.00 (sw) 229	62.0 28.1	9.00 (sw) 229	65.0 29.5	9.00 (sw) 229	+		
				2 ½			2.875 73.0	9.00 229	62.5 28.3	9.00 (sw) 229	53.0 24.0	NA	NA		
				DN65			3.000 76.1	9.00 (sw) 229	71.2 32.3	NA	NA	NA	NA		
				3 DN80			3.500 88.9	9.00 229	62.1 28.2	9.00 (sw) 229	60.0 27.2	NA	NA		
							4.250 108.0	9.02 229	77.6 35.2	9.00 (sw) 229	+	NA	NA		
				4 DN100			4.500 114.3	9.00 229	61.0 27.7	9.00 (sw) 229	61.0 27.7	NA	NA		
							5.250 133.0	9.02 229	84.2 38.2	9.00 (sw) 229	+	NA	NA		
				DN125			5.500 139.7	9.00 (sw) 229	+	9.00 (sw) 229	+	NA	NA		
							6.250 159.0	9.02 229	84.9 38.5	9.00 (sw) 229	+	NA	NA		
				5			5.563 141.3	9.00 (sw) 229	52.0 23.6	9.00 (sw) 229	52.0 23.6	NA	NA		
							6.250 159.0	9.00 229	61.0 27.7	9.00 (sw) 229	+	NA	NA		
							6.500 165.1	9.00 229	64.2 29.1	9.00 (sw) 229	+	NA	NA		
				6 DN150			6.625 168.3	9.00 229	59.0 26.8	9.00 (sw) 229	60.0 27.2	NA	NA		
				8 DN200			8.625 219.1	9.00 229	64.7 29.3	9.00 (sw) 229	64.7 29.3	NA	NA		
300A	x	300A	x	150A	318.5	x	318.5	x	165.2	10.00 (sw) 254	+	NA	NA	NA	NA
				200A			216.3		10.00 (sw) 254	+	NA	NA	NA	NA	NA
				250A			267.4		10.00 254	111.0 50.3	NA	NA	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

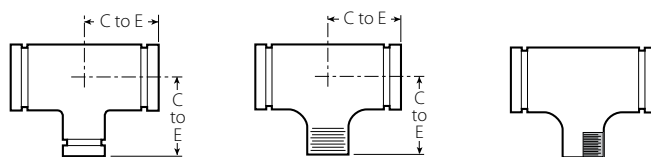

Size					No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch						
Nominal inches DN			Actual Outside Diameter inches mm		C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg					
12 DN300	x	12 DN300	x	¾ DN20	12.750 323.9	x	12.750 323.9	x	1.050 26.9	10.00 (sw) 254	+	NA	NA	10.00 (sw) 254	+
				1 DN25					1.315 33.7	10.00 (sw) 254	70.0 31.8	10.00 (sw) 254	77.0	10.00 (sw) 254	+
				1 ¼ DN32					1.660 42.4	10.00 (sw) 254	+	10.00 (sw) 254	+	10.00 (sw) 254	+
				1 ½ DN40					1.900 48.3	10.00 (sw) 254	+	10.00 (sw) 254	+	10.00 254	+
				2 DN50					2.375 60.3	10.00 (sw) 254	78.0 35.4	10.00 (sw) 254	78.0 35.4	10.00 (sw) 254	+
				2 ½					2.875 73.0	10.00 (sw) 254	80.0 36.3	10.00 (sw) 254	80.0 36.3	NA	NA
				DN65					3.000 76.1	10.00 (sw) 254	+	10.00 (sw) 254	+	10.00 (sw) 254	+
				3 DN80					3.500 88.9	10.00 (sw) 254	80.0 36.3	10.00 (sw) 254	86.5 39.2	NA	NA
									4.250 108.0	10.00 254	+	10.00 (sw) 254	+	NA	NA
				4 DN100					4.500 114.3	10.00 (sw) 254	86.7 39.3	10.00 (sw) 254	77.0 34.9	NA	NA
									5.250 133.0	10.00 254	130.0 59.0	10.00 (sw) 254	+	NA	NA
				DN125					5.500 139.7	10.00 (sw) 254	81.8 37.1	10.00 (sw) 254	+	NA	NA
				5					5.563 141.3	10.00 (sw) 254	75.0 34.0	10.00 (sw) 254	75.0 34.0	NA	NA
									6.250 159.0	10.00 254	125.6 57.0	10.00 (sw) 254	+	NA	NA
									6.500 165.1	10.00 (sw) 254	+	10.00 (sw) 254	+	NA	NA
				6 DN150					6.625 168.3	10.00 254	88.5 40.2	10.00 (sw) 254	75.0 34.0	NA	NA
				8 DN200					8.625 219.1	10.00 254	80.0 36.3	10.00 (sw) 254	80.0 36.3	NA	NA
				10 DN250					10.750 273.0	10.00 254	123.5 56.0	10.00 (sw) 254	84.0 38.1	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

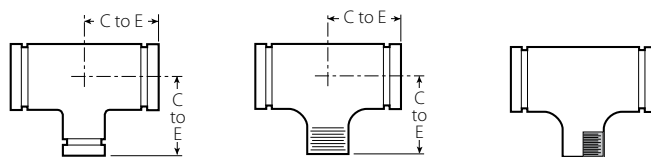

Size			No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN		Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
14 ¹ x 14 x 4 DN350 DN350 DN100		14.000 x 14.000 x 4.500 355.6 355.6 114.3	11.00 (sw) 279	102.0 46.3	11.00 (sw) 279	102.0 46.3	NA	NA
	6 DN150		6.625 168.3	11.00 (sw) 279	108.2 49.1	11.00 (sw) 279	NA	NA
	8 DN200		8.625 219.1	11.00 (sw) 279	112.0 50.8	11.00 (sw) 279	NA	NA
	10 DN250		10.750 273.0	11.00 (sw) 279	120.0 54.4	11.00 (sw) 279	NA	NA
	12 DN300		12.750 323.9	11.00 (sw) 279	129.1 58.6	11.00 (sw) 279	NA	NA
		14.843 377.0	6.500 165.1	11.00 279	142.4 64.6	NA	NA	NA
			8.625 219.1	11.00 279	145.5 66.0	NA	NA	NA
			10.750 273.0	11.00 279	149.9 68.0	NA	NA	NA
			12.750 323.9	11.00 279	144.6 65.6	NA	NA	NA
16 ¹ x 16 x 4 DN400 DN400 DN100		16 x 16 x 4.500 DN400 DN400 114.3	12.00 (sw) 305	130.0 59.0	12.00 (sw) 305	130.0 59.0	NA	NA
	6 DN150		6.625 168.3	12.00 (sw) 305	133.5 60.6	12.00 (sw) 305	NA	NA
	8 DN200		8.625 219.1	12.00 (sw) 305	145.0 65.8	12.00 (sw) 305	NA	NA
	10 DN250		10.750 273.0	12.00 (sw) 305	149.5 67.8	12.00 (sw) 305	NA	NA
	12 DN300		12.750 323.9	12.00 (sw) 305	154.0 69.9	12.00 (sw) 305	NA	NA
	14 DN350		14.000 355.6	12.00 (sw) 305	167.0 75.7	NA	NA	NA
		16.772 x 16.772 x 6.250 426.0 426.0 159.0	12.83 326	189.6 86.0	NA	NA	NA	NA
			8.625 219.1	12.83 326	213.9 97.0	NA	NA	NA
			10.750 273.0	12.83 326	224.9 102.0	NA	NA	NA
			12.750 323.9	12.83 326	224.9 102.0	NA	NA	NA
			14.843 377.0	12.83 326	227.1 103.0	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

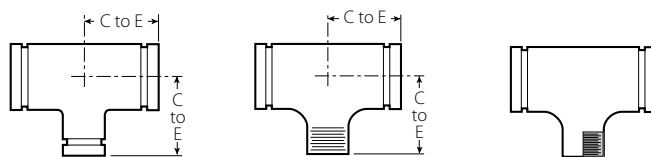

Size			No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch	
Nominal inches DN	Actual Outside Diameter inches mm		C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg
18 ¹ x 18 x 4 DN450 DN450 DN100	18.000 x 18.000 x 4.500	457.2 x 457.2 x 114.3	15.50 (sw) 394	194.0 88.0	15.50 (sw) 394	194.0 88.0	NA	NA
6 DN150		6.625 168.3	15.50 (sw) 394	200.0 90.7	15.50 (sw) 394	200.0 90.7	NA	NA
8 DN200		8.625 219.1	15.50 (sw) 394	202.6 91.9	15.50 (sw) 394	202.0 91.6	NA	NA
10 DN250		10.750 273.0	15.50 (sw) 394	212.0 96.2	15.50 (sw) 394	212.0 96.2	NA	NA
12 DN300		12.750 323.9	15.50 (sw) 394	222.6 101.0	15.50 (sw) 394	222.6 101.0	NA	NA
14 DN350		14.000 355.6	15.50 (sw) 394	230.1 104.4	NA	NA	NA	NA
16 DN400		16 DN400	15.50 (sw) 394	247.6 112.3	NA	NA	NA	NA
	18.898 x 18.898 x 4.250	480.0 x 480.0 x 108.0	14.75 375	282.4 128.1	NA	NA	NA	NA
		5.250 133.0	14.75 375	283.0 128.4	NA	NA	NA	NA
		6.250 159.0	14.75 375	283.3 128.5	NA	NA	NA	NA
		10.750 273.0	14.75 375	285.1 129.3	NA	NA	NA	NA
		14.843 377.0	14.75 375	293.8 133.2	NA	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

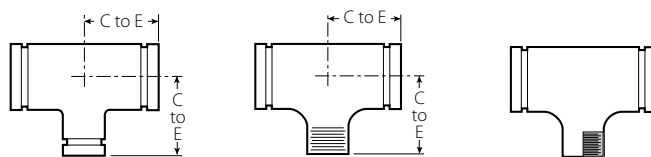

Size						No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch								
Nominal inches DN			Actual Outside Diameter inches mm			C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg							
20 ¹ DN500	x	20 DN500	x	6 DN150	20.000 508.0	x	20.000 508.0	x	6.625 168.3	17.25 (sw) 438	240.0 108.9	17.25 (sw) 438	240.0 108.9	NA	NA			
		8 DN200				8.625 219.1	17.25 (sw) 438	244.0 110.7	17.25 (sw) 438	244.0 110.7	NA	NA						
		10 DN250				10.750 273.0	17.25 (sw) 438	256.0 116.1	17.25 (sw) 438	256.0 116.1	NA	NA						
		12 DN300				12.750 323.9	17.25 (sw) 438	264.3 119.9	17.25 (sw) 438	264.0 119.7	NA	NA						
		14 DN350				14.000 355.6	17.25 (sw) 438	275.0 124.7	NA	NA	NA	NA						
		16 DN400				16.000 406.4	17.25 (sw) 438	288.6 130.9	NA	NA	NA	NA						
		18 DN450				18.000 457.2	17.25 (sw) 438	297.0 134.7	NA	NA	NA	NA						
								20.866 530.0	x	20.866 530.0	x	6.250 159.0	17.25 438	368.2 167.0	NA	NA	NA	NA
												8.625 219.1	17.25 438	401.3 182.0	NA	NA	NA	NA
10.750 273.0	17.25 438		379.2 172.0									NA	NA	NA	NA			
12.750 323.9	17.25 438		401.2 182.0									NA	NA	NA	NA			
14.843 377.0	17.25 438		383.6 174.0									NA	NA	NA	NA			
16.772 426.0	17.25 438		401.2 182.0									NA	NA	NA	NA			
18.898 480.0	17.25 438		399.2 181.1									NA	NA	NA	NA			

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).


4.4 DIMENSIONS (CONTINUED)

Reducing Tee

No. 25

No. 29T

No. 29F

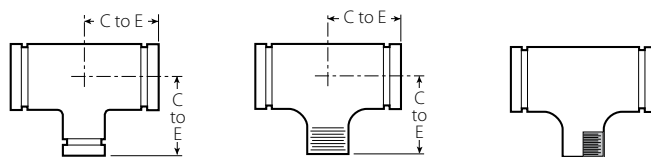

Size				No. 25 Grooved Branch Reducing Tee		No. 29T Reducing Tee Groove x Male Thread ² Branch		No. 29F ² Reducing Tee Groove x Female Thread ² Branch			
Nominal inches DN		Actual Outside Diameter inches mm		C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg	C to E inches mm	Approx. Weight (Each) lb kg		
24 ¹ DN600	x	24 DN600	x	8 DN200	24.000 x 24.000 x 8.625 609.6 609.6 219.1	20.00 (sw) 508	340.0 154.2	20.00 (sw) 508	340.0 154.2	NA	NA
				10 DN250	10.750 273.0	20.00 (sw) 508	343.9 156.0	20.00 (sw) 508	343.9 156.0	NA	NA
				12 DN300	12.750 323.9	20.00 (sw) 508	352.8 160.0	20.00 (sw) 508	352.8 160.0	NA	NA
				14 DN350	14.000 355.6	20.00 508	+	NA	NA	NA	NA
				16 DN400	16.000 406.4	20.00 (sw) 508	378.0 171.5	NA	NA	NA	NA
				18 DN450	18.000 457.2	20.00 508	+	NA	NA	NA	NA
				20 DN500	20.000 508.0	20.00 (sw) 508	400.0 181.4	NA	NA	NA	NA
	24.803 630.0	x	24.803 630.0	x	6.250 159.0	20.00 508	559.2 253.6	NA	NA	NA	NA
					8.625 219.1	20.00 508	559.2 253.6	NA	NA	NA	NA
					10.750 273.0	20.00 508	562.2 255.0	NA	NA	NA	NA
					12.750 323.9	20.00 508	562.2 255.0	NA	NA	NA	NA
					14.843 377.0	20.00 508	586.4 266.0	NA	NA	NA	NA
					16.772 426.0	20.00 508	579.8 263.0	NA	NA	NA	NA
					18.898 480.0	20.00 508	568.8 258.0	NA	NA	NA	NA
					20.866 530.0	20.00 508	574.3 260.5	NA	NA	NA	NA
14 – 60 DN350 – DN1500		For AGS fitting information, see publication 20.05 									

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(sw) = Carbon Steel Segmentally Welded

NA = Not Available

"+" = Contact Victaulic for details


NOTES

- All fittings are ductile iron unless otherwise noted with an (sw).

4.5 DIMENSIONS (CONTINUED)

Pitcher Tee

No. 29P



Size										No. 29P Pitcher Tee Groove x Female Thread Branch			
Nominal inches DN					Actual Outside Diameter inches mm					C to R inches mm	E to E inches mm	C to B inches mm	Approx. Weight (Each) lb kg
4	x	4	x	2½	4.500	x	4.500	x	2.875	4.75	7.50	5.25	10.1
DN100		DN100			114.3		114.3		73.0	121	191	133	4.6


NOTE

- All fittings are ductile iron unless otherwise noted with an (sw).

4.6 DIMENSIONS

45° Lateral

No. 30



Size		No. 30 45° Lateral		
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	4.50 (sw) 114	2.00 (sw) 51	0.9 0.4
1 DN25	1.315 33.7	5.00 (sw) 127	2.25 (sw) 57	1.7 0.8
1 ¼ DN32	1.660 42.4	5.75 (sw) 146	2.50 (sw) 64	2.5 1.1
1 ½ DN40	1.900 48.3	6.25 (sw) 159	2.75 (sw) 70	3.5 1.6
2 DN50	2.375 60.3	7.00 (sw) 178	2.75 (sw) 70	5.1 2.3
2 ½	2.875 73.0	7.75 (sw) 197	3.00 (sw) 76	9.0 4.1
DN65	3.000 76.1	8.50 (sw) 216	3.25 (sw) 83	9.8 4.4
3 DN80	3.500 88.9	8.50 216	3.25 83	10.3 4.6
3 ½ DN90	4.000 101.6	10.00 (sw) 254	3.50 (sw) 89	22.0 10.0
	4.250 108.0	10.50 (sw) 267	3.75 (sw) 95	22.1 10.0
4 DN100	4.500 114.3	10.50 267	3.75 95	17.9 8.1
4 ½	5.000 127.0	12.50 (sw) 318	4.00 (sw) 102	23.8 10.8
	5.250 133.0	12.50 (sw) 318	4.00 (sw) 102	25.3 11.5
DN125	5.500 139.7	12.50 (sw) 318	4.00 (sw) 102	26.8 12.1
5	5.563 141.3	12.50 (sw) 318	4.00 (sw) 102	29.8 13.5
	6.000 152.4	14.00 (sw) 356	4.50 (sw) 114	33.8 15.3
	6.250 159.0	14.00 (sw) 356	4.50 (sw) 114	36.8 16.7
	6.500 165.1	14.00 (sw) 356	4.50 (sw) 114	43.6 19.8
6 DN150	6.625 168.3	14.00 356	4.50 114	43.6 19.8

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded


NOTE

- All fittings are ductile iron unless otherwise noted with an (sw).

4.6 DIMENSIONS (CONTINUED)

45° Lateral

No. 30



Size		No. 30 45° Lateral		
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg
8 DN200	8.625 219.1	18.00 (sw) 457	6.00 (sw) 152	73.0 33.1
10 DN250	10.750 273.0	20.50 (sw) 521	6.50 (sw) 165	105.0 47.6
12 DN300	12.750 323.9	23.00 (sw) 584	7.00 (sw) 178	165.0 74.8
14 ¹ DN350	14.000 355.6	26.50 (sw) 673	7.50 (sw) 191	276.0 125.2
16 ¹ DN400	16.000 406.4	29.00 (sw) 737	8.00 (sw) 203	344.2 156.1
18 ¹ DN450	18.000 457.2	32.00 (sw) 813	8.50 (sw) 216	429.0 194.6
20 ¹ DN500	20.000 508.0	35.00 (sw) 889	9.00 (sw) 229	500.0 226.8
22 ¹ DN550	22.000 558.8	38.00 (sw) 965	9.50 (sw) 241	610.0 276.7
24 ¹ DN600	24.000 609.6	40.00 (sw) 1016	10.00 (sw) 254	715.0 324.3

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded


NOTE

- All fittings are ductile iron unless otherwise noted with an (sw).

4.7 DIMENSIONS

45° Reducing Lateral

No. 30-R SWS



Size										No. 30-R SWS 45° Reducing Lateral (sw)				
Nominal inches DN					Actual Outside Diameter inches DN					C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg		
3 DN80	x	3 DN80	x	2 DN50	3.500 88.9	x	3.500 88.9	2.375 60.3	8.50 216	3.25 83	9.8 4.4			
				2½				2.875 73.0				8.50 216	3.25 83	9.8 4.4
4 DN100	x	4 DN100	x	2 DN50	4.500 114.3	x	4.500 114.3	2.375 60.3	10.50 267	3.75 95	10.0 4.5			
				2½				2.875 73.0				10.50 267	3.75 95	10.0 4.5
								3.500 88.9				10.50 267	3.75 95	18.3 8.3
				3 DN80										
5	x	5	x	2 DN50	5	x	5	2.375 60.3	12.50 318	4.00 102	24.0 10.9			
				3 DN80				3.500 88.9				12.50 318	4.00 102	27.0 12.2
				4 DN100				4.500 114.3				12.50 318	4.00 102	26.5 12.0
6 DN150	x	6 DN150	x	3 DN80	6.625 168.3	x	6.625 168.3	3.500 88.9	14.00 356	4.50 114	37.0 16.8			
				4 DN100				4.500 114.3				14.00 356	4.50 114	36.0 16.3
				5				5.563 141.3				14.00 356	4.50 114	44.7 20.3
8 DN200	x	8 DN200	x	3 DN80	8.625 219.1	x	8.625 219.1	3.500 88.9	18.00 457	6.00 152	58.0 26.3			
				4 DN100				4.500 114.3				18.00 457	6.00 152	62.0 28.1
				5				5.563 141.3				18.00 457	6.00 152	75.5 34.2
				6 DN150				6.625 168.3				18.00 457	6.00 152	82.0 37.2
10 DN250	x	10 DN250	x	4 DN100	10.750 273.0	x	10.750 273.0	4.500 114.3	20.50 521	6.50 165	104.8 47.5			
				5				5.563 141.3				20.50 521	6.50 165	105.0 47.6
				6 DN150				6.625 168.3				20.50 521	6.50 165	105.8 48.0
				8 DN200				8.625 219.1				20.50 521	6.50 165	118.0 53.5
12 DN300	x	12 DN300	x	4 DN100	12.750 323.9	x	12.750 323.9	4.500 114.3	23.00 584	7.00 178	135.0 61.2			
				5				5.563 141.3				23.00 584	7.00 178	122.0 55.3
				6 DN150				6.625 168.3				23.00 584	7.00 178	137.0 62.1
				8 DN200				8.625 219.1				23.00 584	7.00 178	147.0 66.7
				10 DN250				10.750 273.0				23.00 584	7.00 178	167.0 75.7


¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

4.7 DIMENSIONS (CONTINUED)

45° Reducing Lateral

No. 30-R SWS



Size									No. 30-R SWS 45° Reducing Lateral (sw)					
Nominal inches DN					Actual Outside Diameter inches DN				C to LE inches mm	C to SE inches mm	Approx. Weight (Each) lb kg			
14 ¹ DN350	x	14 DN350	x	4 DN100	14.000 355.6	x	14.000 355.6	x	4.500 114.3	26.50 673	7.50 191	176.0 79.8		
				6 DN150					6.625 168.3	26.50 673	7.50 191	187.0 84.8		
				8 DN200					8.625 219.1	26.50 673	7.50 191	210.0 95.3		
				10 DN250					10.750 273.0	26.50 673	7.50 191	235.0 106.6		
				12 DN300					12.750 323.9	26.50 673	7.50 191	252.0 114.3		
									29.00 737	8.00 203	215.0 97.5			
									8.625 219.1	29.00 737	8.00 203	252.5 114.5		
16 ¹ DN400	x	16 DN400	x	6 DN150	16.000 406.4	x	16.000 406.4	x	6.625 168.3	29.00 737	8.00 203	215.0 97.5		
				8 DN200					8.625 219.1	29.00 737	8.00 203	252.5 114.5		
				10 DN250					10.750 273.0	29.00 737	8.00 203	265.0 120.2		
				12 DN300					12.750 323.9	29.00 737	8.00 203	295.0 133.8		
				14 DN350					16.000 406.4	29.00 737	8.00 203	305.0 138.3		
									32.00 813	8.50 216	274.0 124.3			
									8.625 219.1	32.00 813	8.50 216	275.0 124.7		
18 ¹ DN450	x	18 DN450	x	6 DN150	18.000 457.2	x	18.000 457.2	x	6.625 168.3	32.00 813	8.50 216	274.0 124.3		
				8 DN200					8.625 219.1	32.00 813	8.50 216	275.0 124.7		
				10 DN250					10.750 273.0	32.00 813	8.50 216	285.0 129.3		
				12 DN300					12.750 323.9	32.00 813	8.50 216	347.0 157.4		
				14 DN350					14.000 355.6	32.00 813	8.50 216	350.0 158.8		
				16 DN400					16.000 406.4	32.00 813	8.50 216	362.0 164.2		
									35.00 889	9.00 229	410.0 186.0			
20 ¹ DN500	x	20 DN500	x	10 DN250	20.000 508.0	x	20.000 508.0	x	10.750 273.0	35.00 889	9.00 229	410.0 186.0		
				12 DN300					12.750 323.9	35.00 889	9.00 229	415.0 188.2		
				14 DN350					14.000 355.6	35.00 889	9.00 229	420.0 190.5		
				16 DN400					16.000 406.4	35.00 889	9.00 229	425.0 192.8		
									40.00 1016	10.00 254	556.0 252.2			
24 ¹ DN600	x	24 DN600	x	16 DN400	24.000 609.6	x	24.000 609.6	x	16.000 406.4	40.00 1016	10.00 254	556.0 252.2		
				20 DN500					20.000 508.0	40.00 1016	10.00 254	715.0 324.3		
									40.00 1016	10.00 254	715.0 324.3			
14 – 60 DN350 – DN1500					For AGS fitting information, see publication 20.05 									




¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(sw) = Carbon Steel Segmentally Welded

4.8 DIMENSIONS

Tee Wye

No. 32




Size										No. 32 Tee Wye (sw)					
Nominal inches DN					Actual Outside Diameter inches mm					G inches mm	H inches mm	E1 inches mm	E2 inches mm	Approx. Weight (Each) lb kg	
2 DN50	x	2 DN50	x	2 DN50	2.375 60.3	x	2.375 60.3	x	2.375 60.3	2.75 70	7.00 178	9.00 229	4.63 117	6.4 2.9	
2½	x	2½	x	2½	2.875 73.0	x	2.875 73.0	x	2.875 73.0	3.00 76	7.75 197	10.50 267	5.75 146	11.5 5.2	
3 DN80	x	3 DN80	x	2 DN50	3.500 88.9	x	3.500 88.9	x	2.375 60.3	3.25 83	8.50 216	10.38 264	6.00 152	12.5 5.7	
				3 DN80					3.500 88.9	3.25 83	8.50 216	11.50 292	6.50 165	14.3 6.5	
3½ DN90	x	3½ DN90	x	3½ DN90	4.000 101.6	x	4.000 101.6	x	4.000 101.6	3.25 83	10.00 254	13.00 330	7.75 197	15.0 6.8	
4 DN100	x	4 DN100	x	1 DN25	4.500 114.3	x	4.500 114.3	x	1.315 33.7	3.75 95	10.50 267	12.25 311	8.38 213	17.0 7.7	
				2 DN50					2.375 60.3	3.75 95	10.50 267	11.88 302	7.50 191	20.0 9.1	
				3 DN80					3.500 88.9	3.75 95	10.50 267	12.88 327	7.88 200	23.0 10.4	
				4 DN100					4.500 114.3	3.75 95	10.00 254	13.63 346	8.13 206	26.0 11.8	
				5 DN125					5.563 141.3	4.00 102	12.50 318	16.13 410	10.00 254	48.0 21.8	
				6 DN150					6.625 168.3	4.50 114	14.00 356	18.25 464	11.50 292	60.5 27.4	
8 DN200	x	8 DN200	x	2 DN50	8.625 219.1	x	8.625 219.1	x	2.375 60.3	6.00 152	18.00 457	17.00 432	12.63 321	70.0 31.8	
				3 DN80					3.500 88.9	6.00 152	18.00 457	18.19 462	13.19 335	76.0 34.5	
				4 DN100					4.500 114.3	6.00 152	18.00 457	19.00 483	13.50 343	76.4 34.6	
				5 DN125					5.563 141.3	6.00 152	18.00 457	20.00 508	13.88 352	85.6 38.8	
				6 DN150					6.625 168.3	6.00 152	18.00 457	21.13 537	14.38 365	112.0 50.8	
				8 DN200					8.625 219.1	6.00 152	18.00 457	23.25 591	15.25 387	127.9 58.0	

(sw) = Carbon Steel Segmentally Welded

4.8 DIMENSIONS

Tee Wye

No. 32



Size									No. 32 Tee Wye (sw)											
Nominal inches DN					Actual Outside Diameter inches mm				G inches mm	H inches mm	E1 inches mm	E2 inches mm	Approx. Weight (Each) lb kg							
10 DN250	x	10 DN250	x	2 DN50	10.750 273.0	x	10.750 273.0	2.375 60.3	6.50 165	20.50 521	18.75 476	14.38 365	90.0 40.8							
				3 DN80				3.500 88.9	6.50 165	20.50 521	19.88 505	14.88 378	96.0 43.5							
				4 DN100				4.500 114.3	6.50 165	20.50 521	20.75 527	15.25 387	97.4 44.2							
				5				5.563 141.3	6.50 165	20.50 521	21.88 556	15.75 400	115.0 52.2							
				6 DN150				6.625 168.3	6.50 165	20.50 521	22.88 581	16.13 410	133.1 60.4							
				8 DN200				8.625 219.1	6.50 165	20.50 521	27.25 692	19.25 489	156.0 70.8							
				10 DN250				10.750 273.0	6.50 165	20.50 521	27.25 692	18.00 457	190.0 86.2							
				12 DN300				x	12 DN300	x	2 DN50	12.750 323.9	x	12.750 323.9	2.375 60.3	7.00 178	23.00 584	20.75 527	16.38 416	120.0 54.4
											3 DN80				3.500 88.9	7.00 178	23.00 584	21.75 552	16.75 425	125.0 56.7
											4 DN100				4.500 114.3	7.00 178	23.00 584	22.63 575	17.13 435	127.0 57.6
5	5.563 141.3	7.00 178	23.00 584		23.63 600	17.50 445	143.0 64.9													
6 DN150	6.625 168.3	7.00 178	23.00 584		24.78 629	18.03 458	165.0 74.8													
8 DN200	8.625 219.1	7.00 178	23.00 584		26.92 684	18.92 481	176.0 79.8													
10 DN250	10.750 273.0	7.00 178	23.00 584		29.00 737	19.75 502	200.0 90.7													
12 DN300	12.750 323.9	7.00 178	23.00 584		31.00 787	20.50 521	240.0 108.9													

(sw) = Carbon Steel Segmentally Welded




4.9 DIMENSIONS

Adapter Nipple

No. 40

No. 42

No. 43



Size		No. 40 Adapter Nipple Groove x Male Thread ² (s)		No. 42 Adapter Nipple Groove x Bevel (s)		No. 43 Adapter Nipple Groove x Groove (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	3.00 76	0.3 0.1	3.00 76	0.3 0.1	3.00 76	0.3 0.1
1 DN25	1.315 33.7	3.00 76	0.4 0.2	3.00 76	0.4 0.2	3.00 76	0.4 0.2
1 ¼ DN32	1.660 42.4	4.00 102	0.8 0.3	4.00 102	0.8 0.3	4.00 102	0.8 0.3
1 ½ DN40	1.900 48.3	4.00 102	0.9 0.4	4.00 102	0.9 0.4	4.00 102	0.9 0.4
2 DN50	2.375 60.3	4.00 102	1.2 0.6	4.00 102	1.2 0.6	4.00 102	1.2 0.6
2 ½	2.875 73.0	4.00 102	1.9 0.9	4.00 102	1.9 0.9	4.00 102	1.9 0.9
DN65	3.000 76.1	4.00 102	2.0 0.9	4.00 102	2.0 0.9	4.00 102	2.0 0.9
3 DN80	3.500 88.9	4.00 102	2.5 1.1	4.00 102	2.5 1.1	4.00 102	2.5 1.1
3 ½ DN90	4.000 101.6	4.00 102	3.0 1.4	4.00 102	3.0 1.4	4.00 102	3.0 1.4
	4.250 108.0	6.00 152	4.9 2.2	6.00 152	4.9 2.2	6.00 152	4.9 2.2
4 DN100	4.500 114.3	6.00 152	5.4 2.5	6.00 152	5.4 2.5	6.00 152	5.4 2.5
4 ½	5.000 127.0	6.00 152	6.3 2.8	6.00 152	6.3 2.8	6.00 152	6.3 2.8
	5.250 133.0	6.00 152	6.9 3.1	6.00 152	6.9 3.1	6.00 152	6.9 3.1
DN125	5.500 139.7	6.00 152	7.2 3.3	6.00 152	7.2 3.3	6.00 152	7.2 3.3
5	5.563 141.3	6.00 152	7.3 3.3	6.00 152	7.3 3.3	6.00 152	7.3 3.3
	6.000 152.4	6.00 152	8.6 3.9	6.00 152	8.6 3.9	6.00 152	8.6 3.9
	6.250 159.0	6.00 152	9.0 4.1	6.00 152	9.0 4.1	6.00 152	9.0 4.1
	6.500 165.1	6.00 152	9.3 4.2	6.00 152	9.3 4.2	6.00 152	9.3 4.2
6 DN150	6.625 168.3	6.00 152	9.5 4.3	6.00 152	9.5 4.3	6.00 152	9.5 4.3
8 DN200	8.625 219.1	6.00 152	14.3 6.5	6.00 152	14.3 6.5	6.00 152	14.3 6.5
10 DN250	10.750 273.0	8.00 203	22.8 10.3	8.00 203	22.8 10.3	8.00 203	22.8 10.3
12 DN300	12.750 323.9	8.00 203	33.1 15.0	8.00 203	33.1 15.0	8.00 203	33.1 15.0

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel Segmentally Welded

NOTE

- For pump package nipples with 1 ½"/40mm hole cut to receive Style 923 Vic-Let or Style 924 Vic-O-Well request special No. 40, 42 or 43 nipples and specify No. 40-H, 42-H or 43-H on order. Note: 4 – 12"/DN100 – N300 diameter – 8"/200mm length required.




4.9 DIMENSIONS (CONTINUED)

Adapter Nipple

No. 40

No. 42

No. 43



Size		No. 40 Adapter Nipple Groove x Male Thread ² (s)		No. 42 Adapter Nipple Groove x Bevel (s)		No. 43 Adapter Nipple Groove x Groove (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
14 ¹ DN350	14.000 355.6	8.00 203	36.5 16.5	8.00 203	36.5 16.5	8.00 203	36.5 16.5
16 ¹ DN400	16.000 406.4	8.00 203	41.8 19.0	8.00 203	41.8 19.0	8.00 203	41.8 19.0
18 ¹ DN450	18.000 457.2	8.00 203	47.2 21.4	8.00 203	47.2 21.4	8.00 203	47.2 21.4
20 ¹ DN500	20.000 508.0	8.00 203	52.5 23.8	8.00 203	52.5 23.8	8.00 203	52.5 23.8
22 ¹ DN550	22.000 558.8	8.00 203	57.9 26.3	8.00 203	57.9 26.3	8.00 203	57.9 26.3
24 ¹ DN600	24.000 609.6	8.00 203	63.2 28.7	8.00 203	63.2 28.7	8.00 203	63.2 28.7
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 						

¹ For 14"/DN350 and larger roll grooved systems for carbon steel pipe, Victaulic offers fittings for the Advanced Groove System (AGS). Refer to [publication 20.05](#) for more information. For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel Segmentally Welded

NOTE

- For pump package nipples with 1 1/2"/40mm hole cut to receive Style 923 Vic-Let or Style 924 Vic-O-Well request special No. 40, 42 or 43 nipples and specify No. 40-H, 42-H or 43-H on order. Note: 4 – 12"/DN100 – N300 diameter – 8"/200mm length required.


4.10 DIMENSIONS

Cap

No. 60

Bull Plug

No. 61



Size		No. 60 Cap		No. 61 Bull Plug (s)	
Nominal inches DN	Actual Outside Diameter inches mm	T inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	0.91 (s) 23	0.2 0.1	NA	NA
1 DN25	1.315 33.7	0.79 20	0.2 0.1	NA	NA
1 ¼ DN32	1.660 42.4	0.79 20	0.4 0.2	NA	NA
1 ½ DN40	1.900 48.3	0.79 20	0.4 0.2	NA	NA
2 DN50	2.375 60.3	0.88 22	0.7 0.3	4.00 102	2.6 1.2
2 ½	2.875 73.0	0.88 22	1.2 0.5	5.00 127	3.0 1.4
DN65	3.000 76.1	0.88 22	1.2 0.5	NA	NA
3 DN80	3.500 88.9	0.88 22	1.7 0.7	6.00 152	4.5 2.0
3 ½ DN90	4.000 101.6	0.88 22	1.9 0.9	NA	NA
	4.250 108.0	0.92 23	2.6 1.2	NA	NA
4 DN100	4.500 114.3	0.92 23	3.1 1.4	7.00 178	7.5 3.4
4 ½	5.000 127.0	1.00 (s) 25	5.4 2.4	NA	NA
	5.250 133.0	0.92 23	3.9 1.8	NA	NA
DN125	5.500 139.7	0.92 23	4.5 2.0	NA	NA
5	5.563 141.3	0.92 23	4.9 2.2	8.00 203	11.5 5.2
	6.250 159.0	0.92 23	5.7 2.6	NA	NA
	6.500 165.1	0.92 23	6.2 2.8	NA	NA
6 DN150	6.625 168.3	0.92 23	6.4 2.9	10.00 254	18.0 8.2
200A	216.3	1.13 29	17.4 7.9	NA	NA

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (s).
- No. 60 cap is not suitable for use in vacuum service with Style 72 or Style 750 couplings. No. 61 bull plugs should be used.
- Steel dish caps available through 24"/DN600, contact Victaulic.
- No. 60 Caps are available with taps. Tap sizes range from ½" up to 4" maximum, depending on the diameter of the cap, and can be provided centered or offset to suit the application. Contact Victaulic for pricing and availability. All tapped caps are non-cancellable and non-returnable.


4.10 DIMENSIONS

Cap

No. 60

Bull Plug

No. 61



Size		No. 60 Cap		No. 61 Bull Plug (s)	
Nominal inches DN	Actual Outside Diameter inches mm	T inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
8 DN200	8.625 219.1	1.13 29	13.6 6.2	12.00 305	29.0 13.2
10 DN250	10.750 273.0	1.13 29	23.6 10.7	10.00 254	39.0 17.7
12 DN300	12.750 323.9	1.25 32	38.5 17.5	NA	NA
14 ¹ DN350	14.000 355.6	9.50 (s) 241	42.0 19.1	NA	NA
16 ¹ DN400	16.000 406.4	10.00 (s) 254	45.0 20.4	NA	NA
18 ¹ DN450	18.000 457.2	11.00 (s) 279	58.0 26.3	NA	NA
20 ¹ DN500	20.000 508.0	12.00 (s) 305	67.5 30.6	NA	NA
22 ¹ DN550	22.000 558.8	13.00 (s) 330	+	NA	NA
24 ¹ DN600	24.000 609.6	13.50 (s) 343	105.0 47.6	NA	NA
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 				

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details


NOTES

- All fittings are ductile iron unless otherwise noted with an (s).
- No. 60 cap is not suitable for use in vacuum service with Style 72 or Style 750 couplings. No. 61 bull plugs should be used.
- Steel dish caps available through 24"/DN600, contact Victaulic.
- No. 60 Caps are available with taps. Tap sizes range from 1/2" up to 4" maximum, depending on the diameter of the cap, and can be provided centered or offset to suit the application. Contact Victaulic for pricing and availability. All tapped caps are non-cancellable and non-returnable.

4.11 DIMENSIONS

Flanged Adapter Nipple

No. 41



Size		No. 41 ANSI Class 125 Flange Adapter Nipple Flat Face (s)		No. 41-DN PN10/16 Flange Adapter Nipple Flat Face (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
3/4 DN20	1.050 26.9	3.00 76	+	NA	NA
1 DN25	1.315 33.7	3.00 76	2.0 0.9	3.00 76	2.6 1.2
1 1/4 DN32	1.660 42.4	4.00 102	3.0 1.4	3.00 76	4.1 1.9
1 1/2 DN40	1.900 48.3	4.00 102	3.5 1.6	NA	NA
2 DN50	2.375 60.3	4.00 102	5.5 2.5	4.00 102	6.2 2.8
2 1/2	2.875 73.0	4.00 102	8.0 3.6	NA	NA
DN65	3.000 76.1	NA	NA	4.00 102	7.1 3.2
3 DN80	3.500 88.9	4.00 102	9.5 4.3	4.00 102	9.0 4.1
3 1/2 DN90	4.000 101.6	4.00 102	+	NA	NA
	4.250 108.0	NA	NA	NA	NA
4 DN100	4.500 114.3	6.00 152	16.7 7.6	6.00 152	12.8 5.8
4 1/2	5.000 127.0	NA	NA	NA	NA
	5.250 133.0	NA	NA	NA	NA
DN125	5.500 139.7	NA	NA	6.00 152	16.8 7.6
5	5.563 141.3	6.00 152	21.5 9.8	NA	NA
	6.500 165.1	NA	NA	NA	NA
6 DN150	6.625 168.3	6.00 152	26.5 12.0	6.00 152	20.5 9.3
200A	216.3	NA	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS).
For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel


NA = Not Available

"+" = Contact Victaulic for details

4.11 DIMENSIONS (CONTINUED)

Flanged Adapter Nipple

No. 41



Size		No. 41 ANSI Class 125 Flange Adapter Nipple Flat Face (s)		No. 41-DN PN10/16 Flange Adapter Nipple Flat Face (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
8 DN200	8.625 219.1	6.00 152	39.0 17.7	6.00 152	30.8 14.0
250A	267.4	NA	NA	NA	NA
10 DN250	10.750 273.0	8.00 203	64.2 29.1	8.00 203	46.3 21.0
300A	318.5	NA	NA	NA	NA
12 DN300	12.750 323.9	8.00 203	87.0 39.5	8.00 203	58.7 26.6

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS).
For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel




NA = Not Available

"+" = Contact Victaulic for details

4.11 DIMENSIONS (CONTINUED)

Flanged Adapter Nipple

No. 45F
No. 45R
No. 45FE
No. 45RE



Size		No. 45F ANSI Class 150 Flange Adapter Nipple Flat Face		No. 45R ANSI Class 150 Flange Adapter Nipple Raised Face		No. 45FE PN10/16 Flange Adapter Nipple Flat Face		No. 45RE PN10/16 Flange Adapter Nipple Raised Face	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	3.00 (s) 76	2.0 0.9	3.00 (s) 76	2.0 0.9	NA	NA	NA	NA
1 DN25	1.315 33.7	3.00 (s) 76	2.7 1.2	3.00 (s) 76	2.7 1.2	NA	NA	NA	NA
1 ¼ DN32	1.660 42.4	4.00 (s) 102	3.6 1.6	4.00 (s) 102	3.6 1.6	NA	NA	NA	NA
1 ½ DN40	1.900 48.3	4.00 (s) 102	3.9 1.8	4.00 (s) 102	3.9 1.8	2.52 64	+	2.52 64	+
2 DN50	2.375 60.3	4.00 102	6.0 2.7	4.00 102	6.0 2.7	2.52 64	+	2.52 64	+
2 ½	2.875 73.0	4.00 102	9.9 4.5	4.00 102	9.9 4.5	NA	NA	NA	NA
DN65 ²	3.000 76.1	NA	NA	NA	NA	2.52 64	+	2.52 64	+
3 DN80	3.500 88.9	4.00 102	11.7 5.3	4.00 102	11.7 5.3	2.52 64	+	2.52 64	+
3 ½ DN90	4.000 101.6	4.00 (s) 102	13.8 6.3	4.00 (s) 102	13.8 6.3	NA	NA	NA	NA
	4.250 108.0	NA	NA	NA	NA	NA	NA	NA	NA
4 DN100	4.500 114.3	6.00 152	18.5 8.4	6.00 152	18.5 8.4	2.76 70	+	2.76 70	+
DN125	5.500 139.7	NA	NA	NA	NA	2.76 70	+	2.76 70	+
5	5.563 141.3	6.00 (s) 152	21.4 9.7	6.00 (s) 152	21.4 9.7	NA	NA	NA	NA
	6.500 165.1	NA	NA	NA	NA	2.76 70	+	2.76 70	+
6 DN150	6.625 168.3	6.00 152	29.0 13.2	6.00 152	29.0 13.2	2.76 70	+	2.76 70	+
8 DN200	8.625 219.1	6.00 152	42.0 19.1	6.00 152	42.0 19.1	3.15 80	+	3.15 80	+
10 DN250	10.750 273.0	8.00 203	64.2 29.1	8.00 203	64.2 29.1	3.15 80	+	3.15 80	+
12 DN300	12.750 323.9	8.00 203	88.2 40.0	8.00 203	88.2 40.0	3.15 80	+	3.15 80	+
14 ¹ DN350	14.000 355.6	8.00 (s) 203	126.4 57.3	8.00 203	126.4 57.3	NA	NA	NA	NA
16 ¹ DN400	16.000 406.4	8.00 (s) 203	150.0 68.0	8.00 203	150.0 68.0	NA	NA	NA	NA

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

² The DN65 size of No. 45FE and 45RE Flange Adapter Nipples is supplied with eight bolt holes.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details




NOTE

- All fittings are ductile iron unless otherwise noted with an (s).

4.11 DIMENSIONS (CONTINUED)

Flanged Adapter Nipple

No. 45F
No. 45R
No. 45FE
No. 45RE



Size		No. 45F ANSI Class 150 Flange Adapter Nipple Flat Face		No. 45R ANSI Class 150 Flange Adapter Nipple Raised Face		No. 45FE PN10/16 Flange Adapter Nipple Flat Face		No. 45RE PN10/16 Flange Adapter Nipple Raised Face	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
18 ¹ DN450	18.000 457.2	8.00 (s) 203	177.0 80.3	8.00 (s) 203	177.0 80.3	NA	NA	NA	NA
20 ¹ DN500	20.000 508.0	8.00 (s) 203	218.0 98.9	8.00 (s) 203	218.0 98.9	NA	NA	NA	NA
24 ¹ DN600	24.000 609.6	8.00 (s) 203	283.0 128.4	8.00 (s) 203	283.0 128.4	NA	NA	NA	NA
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 								

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTE



- All fittings are ductile iron unless otherwise noted with an (s).

4.16 DIMENSIONS (CONTINUED)

Flange Adapter Nipple

No 46F

No 46R



Size		No. 46F ANSI Class 300 Flange Adapter Nipple Flat Face (s)		No. 46R ANSI Class 300 Flange Adapter Nipple Raised Face (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
3/4 DN20	1.050 26.9	3.00 76	3.3 1.5	3.00 76	+
1 DN25	1.315 33.7	3.00 76	3.9 1.8	3.00 76	3.9 1.8
1 1/4 DN32	1.660 42.4	4.00 102	4.8 2.2	4.00 102	4.8 2.2
1 1/2 DN40	1.900 48.3	4.00 102	6.9 3.1	4.00 102	6.9 3.1
2 DN50	2.375 60.3	4.00 102	8.1 3.7	4.00 102	8.1 3.7
2 1/2	2.875 73.0	4.00 102	11.9 5.4	4.00 102	11.9 5.4
3 DN80	3.500 88.9	4.00 102	16.5 7.5	4.00 102	16.5 7.5
3 1/2 DN90	4.000 101.6	4.00 102	20.1 9.1	4.00 102	20.1 9.1
4 DN100	4.500 114.3	6.00 152	27.4 12.4	6.00 152	27.4 12.4
5	5.563 141.3	6.00 152	35.3 16.0	6.00 152	35.3 16.0
6 DN150	6.625 168.3	6.00 152	47.5 21.5	6.00 152	47.5 21.5
8 DN200	8.625 219.1	6.00 152	68.0 30.8	6.00 152	68.0 30.8
10 DN250	10.750 273.0	8.00 203	100.8 45.7	8.00 203	100.8 45.7
12 DN300	12.750 323.9	8.00 203	148.0 67.1	8.00 203	148.0 67.1
14 ¹ DN350	14.000 355.6	8.00 203	180.0 81.8	NA	NA
16 ¹ DN400	16.000 406.4	8.00 203	237.0 107.5	NA	NA
18 ¹ DN450	18.000 457.2	8.00 203	297.0 134.7	NA	NA
20 ¹ DN500	20.000 508.0	8.00 203	+	NA	NA
22 ¹ DN550	22.000 558.8	8.00 203	+	NA	NA
24 ¹ DN600	24.000 609.6	8.00 203	+	NA	NA
14 – 60 DN350 – DN1500	For AGS fitting information, see publication 20.05 				

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

+ = Contact Victaulic for details




4.12 DIMENSIONS

Swaged Nipple

No. 53

No. 54

No. 55



Size				No. 53 Swage Nipple Groove x Groove (s)		No. 54 Swage Nipple Groove x Male Thread ¹ (s)		No. 55 Swage Nipple Male Thread ¹ x Groove (s)	
Nominal inches DN		Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
2 DN50	x ¾ DN20	2.375 60.3	1.050 26.9	6.50 165	2.0 0.9	NA	NA	NA	NA
	1 DN25		1.315 33.7	6.50 165	2.0 0.9	6.50 165	2.0 0.9	6.50 165	2.0 0.9
	1 ¼ DN32		1.660 42.4	6.50 165	2.0 0.9	6.50 165	2.0 0.9	6.50 165	2.0 0.9
	1 ½ DN40		1.900 48.3	6.50 165	2.0 0.9	6.50 165	2.0 0.9	6.50 165	2.0 0.9
2 ½ DN65	x 1 DN25	2.875 73.0	1.315 33.7	7.00 178	3.0 1.4	7.00 178	3.0 1.4	7.00 178	3.0 1.4
	1 ¼ DN32		1.660 42.4	7.00 178	3.0 1.4	7.00 178	3.0 1.4	7.00 178	3.0 1.4
	1 ½ DN40		1.900 48.3	7.00 178	3.0 1.4	7.00 178	3.0 1.4	7.00 178	3.0 1.4
	2 DN50		2.375 60.3	7.00 178	3.0 1.4	7.00 178	3.0 1.4	7.00 178	3.0 1.4
3 DN80	x 1 ½ DN40	3.000 76.1	1.900 48.3	NA	NA	8.00 203	4.0 1.8	NA	NA
	2 DN50		2.375 60.3	8.00 203	4.0 1.8	NA	NA	NA	NA
3 ½ DN90	x 1 DN25	3.500 88.9	1.315 33.7	8.00 203	4.5 2.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0
	1 ¼ DN32		1.660 42.4	8.00 203	4.5 2.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0
	1 ½ DN40		1.900 48.3	8.00 203	4.5 2.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0
	2 DN50		2.375 60.3	8.00 203	4.5 2.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0
	2 ½ DN65		2.875 73.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0	8.00 203	4.5 2.0
			3.000 76.1	8.00 203	4.5 2.0	8.00 203	4.5 2.0	NA	NA
4 DN100	x 3 DN80	4.000 101.6	3.500 88.9	8.00 203	6.8 3.1	8.00 203	6.8 3.1	8.00 203	6.8 3.1
	1 DN25		1.315 33.7	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4
	1 ¼ DN32		1.660 42.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4	NA	NA
	1 ½ DN40		1.900 48.3	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4
	2 DN50		2.375 60.3	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4
	2 ½ DN65		2.875 73.0	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4
			3.000 76.1	9.00 229	7.5 3.4	NA	NA	NA	NA
	3 DN80		3.500 88.9	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4
	3 ½ DN90		4.000 101.6	9.00 229	7.5 3.4	9.00 229	7.5 3.4	9.00 229	7.5 3.4

¹ Available with British Standard Pipe Threads, specify BSP clearly on order.

(s) = Carbon Steel

NA = Not Available




4.12 DIMENSIONS

Swaged Nipple

No. 53

No. 54

No. 55



Size				No. 53 Swage Nipple Groove x Groove (s)		No. 54 Swage Nipple Groove x Male Thread ¹ (s)		No. 55 Swage Nipple Male Thread ¹ x Groove (s)	
Nominal inches DN		Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
5	x	2 DN50	5.563 141.3	x	2.375 60.3	11.00 279	11.5 5.2	11.00 279	11.5 5.2
6 DN150	x	1 DN25	x	1.315 33.7	12.00 305	17.0 7.7	12.00 305	17.0 7.7	12.00 305
8 DN200	x	6 DN150	x	8.625 219.1	6.625 168.3	12.00 305	29.0 13.2	12.00 305	29.0 13.2

¹ Available with British Standard Pipe Threads, specify BSP clearly on order.


(s) = Carbon Steel

NA = Not Available

4.13 DIMENSIONS

Female Threaded Adapter

No. 80



Size		No. 80 Adapter Groove x Female Thread ¹	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	2.00 (s) 51	0.6 0.3
1 DN25	1.315 33.7	2.08 53	0.4 0.2
1 ¼ DN32	1.660 42.4	2.29 58	0.6 0.3
1 ½ DN40	1.900 48.3	2.29 58	1.0 0.5
2 DN50	2.375 60.3	2.50 64	1.5 0.7
2 ½	2.875 73.0	2.75 70	1.8 0.8
DN65	3.000 76.1	2.75 70	2.2 1.0
3 DN80	3.500 88.9	2.75 70	2.8 1.3
4 DN100	4.500 114.3	3.25 83	4.5 2.0

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel

NOTE


- All fittings are ductile iron unless otherwise noted with an (s).

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size				No. 50 Concentric Reducer		No. 51 Eccentric Reducer			
Nominal inches DN			Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	
1 DN25	x	¾ DN20	1.315 33.7	x	1.050 26.9	8.00 (s) 203	+	8.00 (s) 203	+
1 ¼ DN32	x	¾ DN20	1.660 42.4	x	1.050 26.9	8.00 (s) 203	1.3 0.6	8.00 (s) 203	1.3 0.6
		1 DN25			1.315 33.7	2.50 64	0.6 0.3	8.00 (s) 203	1.4 0.6
1 ½ DN40	x	¾ DN20	1.900 48.3	x	1.050 26.9	8.50 (s) 216	1.5 0.7	8.50 (s) 216	1.5 0.7
		1 DN25			1.315 33.7	2.50 64	0.8 0.4	8.50 (s) 216	1.7 0.8
		1 ¼ DN32			1.660 42.4	2.50 64	0.9 0.4	8.50 (s) 216	1.8 0.8
2 DN50	x	¾ DN20	2.375 60.3	x	1.050 26.9	2.50 64	0.8 0.4	9.00 (s) 229	2.2 1.0
		1 DN25			1.315 33.7	2.50 64	0.7 0.3	9.00 (s) 229	2.3 1.0
		1 ¼ DN32			1 ¼ DN32	2.50 64	0.8 0.4	9.00 (s) 229	2.5 1.1
		1 ½ DN40			1.900 48.3	2.50 64	1.2 0.5	3.50 89	1.1 0.5
2 ½	x	¾ DN20	2.875 73.0	x	1.050 26.9	9.50 (s) 241	+	9.50 (s) 241	+
		1 DN25			1.315 33.7	2.50 64	1.4 0.6	9.50 (s) 241	3.4 1.5
		1 ¼ DN32			1 ¼ DN32	2.50 64	1.4 0.6	3.50 89	1.3 0.6
		1 ½ DN40			1.900 48.3	2.50 64	1.4 0.6	9.50 (s) 241	3.8 1.7
		2 DN50			2.375 60.3	2.50 64	1.5 0.7	3.50 89	1.6 0.7
DN65	x	1 DN25	3.000 76.1	x	1.315 33.7	2.50 64	+	9.50 (s) 241	+
		1 ¼ DN32			1.660 42.4	2.50 64	+	9.50 (s) 241	+
		1 ½ DN40			1.900 48.3	2.50 64	+	9.50 (s) 241	+
		2 DN50			2.375 60.3	2.50 64	+	9.50 (s) 241	+
		2 ½			2.875 73.0	2.50 64	+	9.50 (s) 241	+

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS (CONTINUED)

Concentric/Eccentric Reducer

No. 50

No. 51



Size			No. 50 Concentric Reducer		No. 51 Eccentric Reducer	
Nominal inches DN		Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
3 DN80	x ¾ DN20	3.500 88.9	9.50 (s) 241	+	9.50 (s) 241	+
	1 DN25	1.315 33.7	2.50 64	1.8 0.8	9.50 (s) 241	4.8 2.2
	1 ¼ DN32	1.660 42.4	2.50 64	1.4 0.6	9.50 (s) 241	5.0 2.3
	1 ½ DN40	1.900 48.3	2.50 64	2.0 0.9	9.50 (s) 241	5.1 2.3
	2 DN50	2.375 60.3	2.50 64	1.6 0.7	3.50 89	1.9 0.9
	2 ½	2.875 73.0	2.50 64	1.7 0.7	3.50 89	2.1 1.0
		3.000 76.1	2.50 64	2.1 1.0	9.50 (s) 241	5.4 2.4
	DN65					
3 ½ DN90	x 3 DN80	4.000 101.6	2.50 64	2.1 1.0	10.00 (s) 254	7.0 3.2
		4.250 108.0	3.50 89	+	NA	NA
			3.000 76.1	+	NA	NA
4 DN100	x 1 DN25	4.500 114.3	3.00 76	3.0 1.4	10.00 (s) 254	6.5 2.9
	1 ¼ DN32	1.660 42.4	10.00 (s) 254	+	10.00 (s) 254	+
	1 ½ DN40	1.900 48.3	3.00 76	2.6 1.2	10.00 (s) 254	6.9 3.1
	2 DN50	2.375 60.3	3.00 76	3.4 1.5	4.00 102	2.9 1.3
	DN65	3.000 76.1	3.00 76	3.3 1.5	4.00 102	3.2 1.4
	2 ½	2.875 73.0	3.00 76	3.3 1.5	4.00 102	3.1 1.4
	3 DN80	3.500 88.9	3.00 76	3.2 1.5	4.00 102	3.4 1.5
	3 ½ DN90	4.000 101.6	3.00 76	3.0 1.4	10.00 (s) 254	8.1 3.7
		5.250 133.0	4.50 114	+	NA	NA

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size		No. 50 Concentric Reducer		No. 51 Eccentric Reducer	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
DN125 x 2 DN50	5.500 x 2.375 139.7 60.3	11.00 (s) 279		11.00 (s) 279	
		4.50 114	4.1 1.9	11.00 (s) 279	10.7 4.9
		4.50 114	5.7 2.6	11.00 (s) 279	+
		4.50 114	5.1 2.3	5.00 127	+
5 x 2 DN50	5.563 x 2.375 141.3 60.3	11.00 (s) 279	10.1 4.6	11.00 (s) 279	10.1 4.6
		4.00 102	4.3 2.0	11.00 279	10.8 4.9
		4.00 102	5.7 2.6	11.00 (s) 279	11.1 5.0
		4.00 102		11.00 (s) 279	+
		3.50 89	4.3 2.0	5.00 127	5.5 2.5
	6.250 x 3.500 159.0 88.9	4.50 114	+	NA	NA
		4.00 102	+	NA	NA
		4.00 102	+	NA	NA
		4.00 102	+	NA	NA
	6.500 x 2.375 165.1 60.3	4.00 102	6.1 2.8	11.50 (s) 292	NA
		4.00 102	5.9 2.7	10.50 (s) 292	18.1 8.2
		4.00 102	6.2 2.8	5.50 140	6.1 2.8
		4.00 102	6.2 2.8	5.50 140	6.8 3.1
		4.00 102	5.6 2.5	5.50 140	8.0 3.6
		5.500 139.7	5.6 2.5	5.50 140	8.0 3.6
		5.563 141.3	6.4 2.9	5.50 140	7.5 3.4
		6.250 159.0	6.6 3.0	NA	NA

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size						No. 50 Concentric Reducer		No. 51 Eccentric Reducer			
Nominal inches DN			Actual Outside Diameter inches mm			E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg		
6 DN150	x	1 DN25	6.625 168.3	x	1.315 33.7	4.00 102	6.2 2.8	11.50 (s) 292	+		
		1 ½ DN40			1.900 48.3	11.50 (s) 292	+	11.50 (s) 292	+		
		2 DN50			2.375 60.3	4.00 102	6.6 3.0	11.50 (s) 292	14.2 6.4		
		2 ½			2.875 73.0	4.00 102	6.4 2.9	11.50 (s) 292	14.2 6.4		
		DN65			3.000 76.1	11.50 (s) 292	+	11.50 (s) 292	+		
		3 DN80			3.500 88.9	4.00 102	6.4 2.9	5.50 140	7.4 3.4		
		4 DN100			4.500 114.3	4.00 102	5.8 2.6	5.50 140	7.8 3.5		
		DN125			5.500 139.7	4.00 102	6.4 2.9	5.50 140	8.1 3.7		
		5			5.563 141.3	4.00 102	6.4 2.9	5.50 140	8.1 3.7		
					6.500 165.1	4.00 102	7.2 3.3	11.50 (s) 292	+		
					8.515 216.3	x	3.500 88.9	5.00 127	+	NA	NA
							4.500 114.3	5.00 127	+	NA	NA
							5.500 139.7	4.50 114	+	NA	NA
200A	x	165A	216.3	x	6.500 165.1	5.00 127	9.5 4.3	NA	NA		

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size				No. 50 Concentric Reducer		No. 51 Eccentric Reducer	
Nominal inches DN		Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
8 DN200	x 2 1/2	8.625 219.1	x 2.875 73.0	12.00 (s) 305	+	12.00 (s) 305	+
				12.00 (s) 305	+	12.00 (s) 305	+
	x 3 DN80			5.00 127	9.3 4.2	12.00 (s) 305	22.0 10.0
				4.250 108.0	5.00 127	NA	NA
	x 4 DN100			4.500 114.3	5.00 127	6.00 152	10.5 4.8
				5.500 139.7	5.00 127	12.00 (s) 305	24.5 11.1
	x 5 DN125			5.563 141.3	5.00 127	12.00 (s) 305	23.8 10.8
				6.250 159.0	4.50 114	NA	NA
	x 6 DN150			6.500 165.1	4.50 114	6.00 152	12.8 5.8
				6.625 168.3	5.00 127	6.00 152	13.2 6.0
10 DN250	x 4 DN100	10.750 273.0	x 4.500 114.3	6.25 159	20.1 9.1	13.00 (s) 330	33.8 15.3
				5.500 139.7	13.00 (s) 330	13.00 (s) 330	35.7 16.2
	x 5 DN125			5.563 141.3	13.00 (s) 330	13.00 (s) 330	35.8 16.2
				6.500 165.1	6.00 152	13.00 (s) 330	+
	x 6 DN150			6.625 168.3	6.00 152	13.00 (s) 330	36.9 16.7
				8.625 219.1	6.00 152	7.00 178	37.0 16.8
	x 8 DN200			6.00 152	23.0 10.4	NA	NA
				6.00 152	23.0 10.4	NA	NA
12 DN300	x 4 DN100	12.750 323.9	x 4.500 114.3	14.00 (s) 356	48.0 21.8	14.00 (s) 356	48.0 21.8
				6.500 165.1	14.00 (s) 356	14.00 (s) 356	+
	x 6 DN150			6.625 168.3	7.00 178	14.00 (s) 356	50.2 22.8
	x 8 DN200			8.625 219.1	7.00 178	14.00 (s) 356	53.5 24.3
	x 10 DN200			10.750 273.0	7.00 178	14.00 (s) 356	56.5 25.6

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size						No. 50 Concentric Reducer		No. 51 Eccentric Reducer		
Nominal inches DN			Actual Outside Diameter inches mm			E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg	
300A	x	250A	318.5	x	216.3	7.00 178	38.0 17.2	NA	NA	
14 ¹ DN350	x	6 DN150	14.000 355.6	x	6.625 168.3	13.00 330	63.1 28.6	13.00 330	77.2 35.0	
		8 DN200			8.625 219.1	13.00 330	72.7 33.0	13.00 330	81.6 37.0	
					10.528 267.4	13.00 330	80.5 36.5	13.00 330	88.2 40.0	
		10 DN200			10.750 273.0	13.00 330	80.5 36.5	13.00 330	88.2 40.0	
					12.539 318.5	13.00 330	81.6 37.0	13.00 330	90.4 41.0	
		12 DN300			12.750 323.9	13.00 330	81.6 37.0	13.00 330	90.4 41.0	
16 ¹ DN400	x	8 DN200	16.000 406.4	x	8.625 219.1	14.00 356	80.5 36.5	14.00 356	99.2 45.0	
		250A			267.4	14.00 356	93.0 42.2	NA	NA	
		10 DN200			10.750 273.0	14.00 356	93.0 42.2	14.00 356	99.2 45.0	
					12.539 318.5	14.00 356	100.3 45.5	14.00 356	103.6 47.0	
		12 DN300			12.750 323.9	14.00 356	100.3 45.5	14.00 356	103.6 47.0	
		14 DN350			14.000 355.6	14.00 356	100.3 45.5	14.00 356	108.0 49.0	
18 ¹ DN450	x	10 DN200	18.000 457.2	x	10.750 273.0	15.00 381	112.4 51.0	15.00 381	125.7 57.0	
		12 DN300			12.750 323.9	15.00 381	122.4 55.5	15.00 381	134.5 61.0	
		14 DN350			14.000 355.6	15.00 381	122.4 55.5	15.00 381	136.7 62.0	
		16 DN400			16.000 406.4	15.00 381	126.8 57.5	15.00 381	143.3 65.0	

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES


- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.15 DIMENSIONS

Concentric/Eccentric Reducer

No. 50

No. 51



Size		No. 50 Concentric Reducer		No. 51 Eccentric Reducer	
Nominal inches DN		Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg
20 ¹ DN500	x	10 DN200	20.000 508.0	20.00 508	160.0 72.6
		300A	318.5	20.00 508	162.3 73.6
		12 DN300	12.750 323.9	20.00 508	162.3 73.6
		14 DN350	14.000 355.6	20.00 508	177.5 80.5
		16 DN400	16.000 406.4	20.00 508	176.4 80.0
		18 DN450	18.000 457.2	20.00 508	205.0 93.0
24 ¹ DN600	x	10 DN200	24.000 609.6	20.00 508	222.7 101.0
		12 DN300	12.750 323.9	20.00 508	209.4 95.0
		14 DN350	14.000 355.6	20.00 508	213.8 97.0
		16 DN400	16.000 406.4	20.00 508	215.8 97.9
		18 DN450	18.000 457.2	20.00 508	229.3 104.0
		20 DN500	20.000 508.0	20.00 508	+ 275.6
14 – 60 DN350 – DN1500		For AGS fitting information, see publication 20.05 AGS™			

¹ For 14"/DN350 and larger roll grooved systems, Victaulic offers the Advanced Groove System (AGS). For pricing and availability of cut groove fittings in this size, contact your nearest Victaulic sales representative.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTES

- All fittings are ductile iron unless otherwise noted with an (s).
- Available with make threaded small end No. 52
- Steel eccentric reducers available through 30"/DN750, contact Victaulic for dimensions.

4.16 DIMENSIONS

Small Threaded Reducer

No. 52

No. 52F



Size			No. 52 Concentric Reducer Groove x Male Thread ¹		No. 52F Concentric Reducer Groove x Female BSPT Thread	
Nominal inches DN		Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
1 ¼ DN32	x	1 DN25	1.660 42.4	x 1.315 33.7	NA	NA
1 ½ DN40	x	1 DN25	1.900 48.3	x 1.315 33.7	2.50 64	0.8 0.4
		1 ¼ DN32		1.660 42.4	2.50 64	0.9 0.4
2 DN50	x	¾ DN20	2.375 60.3	x 1.050 26.9	2.56 65	0.8 0.4
		1 DN25		1.315 33.7	2.50 64	0.9 0.4
		1 ¼ DN32		1.660 42.4	2.50 64	0.9 0.4
		1 ½ DN40		1.900 48.3	2.50 64	1.0 0.5
2 ½	x	1 DN25	2.875 73.0	x 1.315 33.7	2.50 64	1.1 0.5
		1 ¼ DN32		1.660 42.4	2.50 64	1.6 0.7
		1 ½ DN40		1.900 48.3	2.50 64	1.6 0.7
		2 DN50		2.375 60.3	2.50 64	1.8 0.8
DN65	x	1 DN25	3.000 76.1	x 1.315 33.7	2.50 64	1.8 0.8
		1 ¼ DN32		1.660 42.4	2.50 64	1.8 0.8
		1 ½ DN40		1.900 48.3	2.50 64	1.8 0.8
		2 DN50		2.375 60.3	2.50 64	1.8 0.8

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel

NA = Not Available


"+" = Contact Victaulic for details

NOTE

- All fittings are ductile iron unless otherwise noted with an (s).

4.16 DIMENSIONS

Small Threaded Reducer No. 52 No. 52F



Size				No. 52 Concentric Reducer Groove x Male Thread ¹		No. 52F Concentric Reducer Groove x Female BSPT Thread	
Nominal inches DN		Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
3 DN80	x	3/4 DN25	3.500 88.9	1.050 26.9	9.50 (s) 241	+	NA
				1.315 33.7	2.50 64	1.8 0.8	NA
				1.660 42.4	2.50 64	1.5 0.7	2.50 64
				1.900 48.3	2.50 64	2.2 1.0	2.50 64
				2.375 60.3	2.50 64	2.0 0.9	2.50 64
				2.875 73.0	2.50 64	2.4 1.1	NA
				3.000 76.1	2.50 64	2.4 1.1	2.50 64
							2.0 0.9
		1 DN25	4.250 108.0	1.660 42.4	NA	NA	3.00 76
				1.900 48.3	NA	NA	3.00 76
				2.375 60.3	3.00 76	1.3 0.6	3.00 76
				2.875 73.0	3.00 76	1.3 0.6	NA
				3.000 76.1	3.00 76	1.3 0.6	NA
				3.500 88.9	3.50 89	3.4 1.5	NA
							NA
							NA
4 DN100	x	1 DN25	4.500 114.3	1.315 33.7	3.00 76	3.0 1.4	NA
				1.660 42.4	NA	NA	3.00 76
				1.900 48.3	3.00 76	2.7 1.2	3.00 76
				2.375 60.3	3.00 76	3.5 1.6	3.00 76
				2.875 73.0	3.00 76	3.5 1.6	NA
				3.000 76.1	3.00 76	2.9 1.3	NA
				3.500 88.9	3.00 76	3.5 1.6	NA
							NA
							NA
							NA

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTE

- All fittings are ductile iron unless otherwise noted with an (s).

4.16 DIMENSIONS

Small Threaded Reducer

No. 52

No. 52F



Size			No. 52 Concentric Reducer Groove x Male Thread ¹		No. 52F Concentric Reducer Groove x Female BSPT Thread	
Nominal inches DN	Actual Outside Diameter inches mm		E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
	5.250 133.0	x 3.500 88.9	4.50 114	4.6 2.1	NA	NA
DN125 x DN65	5.500 139.7	x 3.000 76.1	4.50 114	4.4 2.0	NA	NA
		3.500 88.9	4.50 114	4.4 2.0	NA	NA
5 x 2	5.563 141.3	x 2.375 60.3	11.00 (s) 279	3.5 1.6	NA	NA
		3.500 88.9	11.00 (s) 279	3.6 1.6	NA	NA
		4.500 114.3	11.00 (s) 279	11.9 5.4	NA	NA
	6.250 159.0	x 1.660 42.4	NA	NA	4.50 114	5.5 2.5
		1.900 48.3	NA	NA	4.50 114	5.5 2.5
		2.375 60.3	NA	NA	4.50 114	5.5 2.5
		3.000 76.1	4.50 114	5.1 2.3	NA	NA
		3.500 88.9	4.75 121	5.5 2.5	NA	NA
	6.500 165.1	x 1.660 42.4	NA	NA	4.00 102	6.4 2.9
		1.900 48.3	NA	NA	4.00 102	6.6 3.0
		2.375 60.3	4.00 102	5.5 2.5	4.00 102	6.6 3.0
		3.000 76.1	4.00 102	5.9 2.7	NA	NA
		3.500 88.9	4.00 102	6.6 3.0	NA	NA

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details

NOTE


- All fittings are ductile iron unless otherwise noted with an (s).

4.16 DIMENSIONS

Small Threaded Reducer

No. 52

No. 52F



Size		No. 52 Concentric Reducer Groove x Male Thread ¹		No. 52F Concentric Reducer Groove x Female BSPT Thread	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg	E to E inches mm	Approx. Weight (Each) lb kg
6 x 1 DN150 x DN25	6.625 x 1.315 168.3 x 33.7	4.00 102	5.5 2.5	NA	NA
	2 x 2.375 DN50 x 60.3	4.00 102	6.7 3.0	NA	NA
	2½ x 2.875 73.0	4.00 102	5.8 2.6	NA	NA
	3 x 3.500 DN80 x 88.9	4.00 102	8.0 3.6	NA	NA
	4 x 4.500 DN100 x 114.3	11.50 (s) 292	15.9 7.2	NA	NA
	5 x 5.563 141.3	11.50 (s) 292	20.0 9.1	NA	NA
	8 x 4.500 DN200 x 114.3	12.00 (s) 305	22.9 10.4	NA	NA
	6 x 6.625 DN150 x 168.3	12.00 (s) 305	25.0 11.3	NA	NA

¹ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

(s) = Carbon Steel

NA = Not Available

"+" = Contact Victaulic for details


NOTE

- All fittings are ductile iron unless otherwise noted with an (s).

4.16 DIMENSIONS (CONTINUED)

Hose Nipple

No. 48



Size		No. 48 Hose Nipple (s)	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight (Each) lb kg
¾ DN20	1.050 26.9	3.13 79	0.3 0.1
1 DN25	1.315 33.7	3.38 86	0.4 0.2
1 ¼ DN32	1.660 42.4	3.88 98	0.6 0.3
1 ½ DN40	1.900 48.3	3.88 98	0.8 0.4
2 DN50	2.375 60.3	4.50 114	1.0 0.4
2 ½	2.875 73.0	5.38 137	2.0 0.9
3 DN80	3.500 88.9	5.75 146	3.1 1.4
4 DN100	4.500 114.3	7.00 178	4.9 2.2
5	5.563 141.3	8.75 222	8.0 3.6
6 DN150	6.625 168.3	10.13 257	14.3 6.5
8 DN200	8.625 219.1	11.88 302	24.7 11.2
10 DN250	10.750 273.0	12.50 318	41.0 18.6
12 DN300	12.750 323.9	14.50 368	62.0 28.1

(s) = Carbon Steel

5.0 PERFORMANCE

Flow Data

(Frictional Resistance)

The chart expresses the frictional resistance of various Victaulic fittings as equivalent feet of straight pipe. Fittings not listed can be estimated from the data given, for example, a 22½° elbow is approximately one-half the resistance of a 45° elbow. Values of mid-sizes can be interpolated.

Size		90° Elbows		45° Elbows		Tees	
Nominal inches DN	Actual Outside Diameter inches mm	No. 10 Std. Radius feet meters	No. 100 1 ½ D Long Radius feet meters	No. 11 Std. Radius feet meters	No. 110 1 ½ D Long Radius feet meters	Branch feet meters	Run feet meters
¾ DN20	1.050 26.9	1.4 0.4	—	0.7 0.2	—	3.3 1.0	1.4 0.4
1 DN25	1.315 33.7	1.7 0.5	—	0.8 0.2	—	4.2 1.3	1.7 0.5
1 ¼ DN32	1.660 42.4	3.8 1.1	—	4.5 1.4	—	6.1 1.9	1.5 0.5
1 ½ DN40	1.900 48.3	5.5 1.7	—	3.7 1.1	—	6.1 1.9	1.2 0.4
2 DN50	2.375 60.3	3.6 1.1	2.5 0.8	1.8 0.5	1.1 0.3	8.5 2.6	3.6 1.1
DN65	3.000 76.1	4.3 1.3	—	2.3 0.7	—	10.8 3.3	4.3 1.3
3 DN80	3.500 88.9	5.0 1.5	3.8 1.2	2.6 0.8	1.6 0.5	13.0 4.0	5.0 1.5
	4.250 108.0	6.4 2.0	—	3.2 1.0	—	15.3 4.7	6.4 2.0
4 DN100	4.500 114.3	6.8 2.1	5.0 1.5	3.4 1.0	2.1 0.6	16.0 4.9	6.8 2.1
	5.250 133.0	8.1 2.5	—	4.1 1.3	—	20.0 6.1	8.1 2.5
DN125	5.500 139.7	8.5 2.6	—	4.2 1.3	—	21.0 6.4	8.5 2.6
5	5.563 141.3	8.5 2.6	—	4.2 1.3	—	21.0 6.4	8.5 2.6
	6.250 159.0	9.4 2.9	—	4.9 1.5	—	25.0 7.6	9.6 2.9
	6.500 165.1	9.6 2.9	—	5.0 1.5	—	25.0 7.6	10.0 3.0
6 DN150	6.625 168.3	10.0 3.0	7.5 2.3	5.0 1.5	3.0 0.9	25.0 7.6	10.0 3.0
8 DN200	8.625 219.1	13.1 4.0	9.8 3.0	6.5 2.0	4.0 1.2	33.1 10.1	13.1 4.0
10 DN250	10.750 273.0	17.0 5.2	12.0 3.7	8.3 2.5	5.0 1.5	41.0 12.5	17.0 5.2
12 DN300	12.750 323.9	20.0 6.1	14.5 4.4	10.0 3.0	6.0 1.8	50.0 15.2	20.0 6.1
14 DN350	14.000 355.6	24.5 ¹ 7.5	15.8 4.8	18.5 ¹ 5.6	11.0 3.4	70.0 21.3	23.0 7.0
16 DN400	16.000 406.4	28.0 ¹ 8.5	18.0 5.5	21.0 ¹ 6.4	13.0 4.0	80.0 24.4	27.0 8.2
18 DN450	18.000 457.2	31.0 ¹ 9.4	20.0 6.1	23.5 ¹ 7.2	14.0 4.3	90.0 27.4	30.0 9.1
20 DN500	20.000 508.0	34.0 ¹ 10.4	22.5 6.9	25.5 ¹ 7.8	16.0 4.9	100.0 30.5	33.0 10.1
24 DN600	24.000 609.6	42.0 ¹ 12.8	27.0 8.2	29.5 ¹ 9.0	19.0 5.8	120.0 36.6	40.0 12.2

¹ Fitting flow data for 14-24/DN350-DN600 size No. 10 and No. 11 Elbows is based on fittings for Style 07 and Style 77 couplings. For flow data on AGS fittings (No. W10 and No. W11 Elbows), refer to publication 20.05.

6.0 NOTIFICATIONS

⚠ WARNING



- Read and understand all instructions before attempting to install any Victaulic products.
- Always verify that the piping system has been completely depressurized and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.
- Confirm that any equipment, branch lines, or sections of piping that may have been isolated for/during testing or due to valve closures/positioning are identified, depressurized, and drained immediately prior to installation, removal, adjustment, or maintenance of any Victaulic products.
- Always reference Victaulic [publication I-ENDCAP](#) for important end cap installation safety instructions.
- Wear safety glasses, hardhat, foot protection, and hearing protection.

Failure to follow these instructions could result in death or serious personal injury and property damage.

7.0 REFERENCE MATERIALS



Galvanized
[Publication 07.01](#) for Original Groove Fittings
[Publication 20.05](#) for AGS Fittings



Plain End
[Publication 14.04](#)



Extra Heavy EndSeal "ES"
[Publication 07.03](#)



Stainless Steel
[Publication 17.16](#)



Fabricated Steel Fittings
[Publication 07.04](#)



AGS - Advanced Groove System
from 14 - 60"/DN350 - DN1500
[Publication 20.05](#)



Shouldered Ends
[Publication 07.06](#)



Aluminum
[Publication 21.03](#)



xL fittings for abrasive services
[Publication 07.07](#)



Copper
[Publication 22.04](#)



Victaulic Base Support Elbows
[Publication 07.13](#)



Ductile Iron for AWWA size pipe
[Publication 23.05](#)

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for determining the suitability of Victaulic products for their end-use application, in accordance with industry standards, project specifications, and Victaulic's published performance, maintenance, and safety data, as well as all warnings and installation instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, warranty, installation instructions, or this disclaimer.

Installation

Always refer to and follow the [Victaulic Installation Handbook](#) or installation instructions for the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at [victaulic.com](#).

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Intellectual Property Rights

No statement concerning the use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its affiliates, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries. Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.

Note

All products bearing a Victaulic trademark are manufactured by Victaulic or to Victaulic specifications. All products are to be installed only in accordance with the applicable Victaulic installation instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.