

Plain End Fittings

STYLE 99



SEE VICTAULIC PUBLICATION 10.01 FOR DETAILS

Victaulic Plain End Fittings are designed for use with Style 99 Roust-A-Bout® couplings in conjunction with plain end or beveled end pipe. Fittings are cast of ductile iron and finished with a dip coat of enamel. Hot dip galvanizing and other coatings are available.

Plain End Fittings are of full flow design to provide maximum flow. In some sizes and styles, welded steel fittings are supplied. Victaulic long radius fittings are available in many sizes and styles.



WARNING



WARNING

Victaulic plain end fittings must be used with Style 99 Roust-A-Bout couplings.

MATERIAL SPECIFICATIONS

Housing: Ductile iron conforming to ASTM A-395, grade 65-45-15, and ASTM A-536, grade 65-45-12.

Nipples: (Adapter, swaged & hose).

- 1 - 1½" – Carbon steel, Schedule 40, conforming to ASTM A-53, Type F.
- 2 - 6" – Carbon steel, Schedule 40, conforming to ASTM A-53, Type E or S, Gr. B.
- 8 - 12" – Carbon steel, Schedule 30, conforming to ASTM A-53, Type E or S, Gr. B.
- Steel – Carbon steel, forged.


Steel, Segmentally Welded: (See steel, Nipples Specifications)

Fitting Coating: Orange enamel

- **Optional:** Hot dipped galvanized and others. Some fittings supplied electroplated as standard – see product specifications.

DIMENSIONS

Plain End Fittings
Required Tangent
Length



Roust-A-Bout											
Fitting Size			Fitting Size			Fitting Size			Fitting Size		
Nominal Dia. Inches mm	Actual Out. Dia. Inches mm	Min. Tang. Length "T" Inches mm	Nominal Dia. Inches mm	Actual Out. Dia. Inches mm	Min. Tang. Length "T" Inches mm	Nominal Dia. Inches mm	Actual Out. Dia. Inches mm	Min. Tang. Length "T" Inches mm	Nominal Dia. Inches mm	Actual Out. Dia. Inches mm	Min. Tang. Length "T" Inches mm
1 ½ 40	1.900 48.3	1.50 38	3 ½ 90	4.000 101.6	1.75 45	165.1 mm	6.500 165.1	2.13 54	12 300	12.750 323.9	2.25 57
2 50	2.375 60.3	1.75 45	4 100	4.500 114.3	2.00 51	8 200	8.625 219.1	2.25 57	14 350	14.000 355.6	2.25 57
2 ½ 65	2.875 73.0	1.75 45	5 125	5.563 141.3	2.13 54	10 250	10.750 273.0	2.25 57	16 400	16.000 406.4	2.25 57
3 80	3.500 88.9	1.75 45	6 150	6.625 168.3	2.13 54						

JOB/OWNER

System No. _____

Location _____

CONTRACTOR

Submitted By _____

Date _____

ENGINEER

Spec Sect _____ Para _____

Approved _____

Date _____

www.victaulic.com

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2011 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

REV_F




14.04_1

Plain End Fittings

STYLE 99

DIMENSIONS

Plain End Fittings

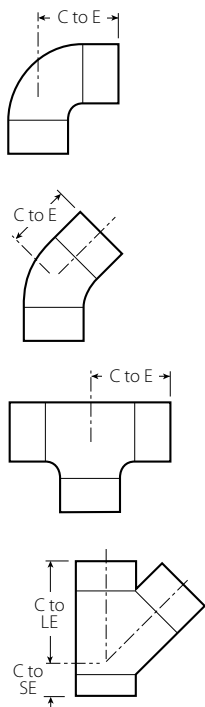


Fitting Size		No. 10P 90° Elbow		No. 11P 45° Elbow		No. 20P Tee		No. 30P (sw) 45° Lateral		
Nominal Size Inches mm	Actual Out. Dia. Inches mm	C to E Inches mm	Aprx. Weight Lbs kg	C to E Inches mm	Aprx. Weight Lbs kg	C to E Inches mm	Aprx. Weight Lbs kg	C to LE In./mm	C to SE In./mm	Aprx. Weight Lbs kg
1 25	1.315 33.7	2.25 57	0.6 0.3	1.75 44	0.6 0.3	2.25 (sw) 57	1.0 0.5	5.00 127	2.25 57	3.5 1.6
1 ½ 40	1.900 48.3	4.00 (sw) 102	1.4 0.6	2.88 (sw) 73	1.0 0.5	2.75 (sw) 70	1.7 0.8	6.25 159	2.75 70	3.5 1.6
2 50	2.375 60.3	4.75 (sw) 121	2.9 1.3	3.13 (sw) 80	1.4 0.6	3.25 (sw) 83	3.0 1.4	7.25 184	2.75 70	5.1 2.3
2 ½ 65	2.875 73.0	5.50 (sw) 140	3.9 1.8	3.50 (sw) 89	2.3 1.0	3.75 (sw) 95	6.8 3.1	7.75 197	3.00 76	9.3 4.2
3 80	3.500 88.9	6.25 (sw) 159	6.15 2.8	3.75 (sw) 95	4.3 2.0	4.25 (sw) 108	9.0 4.1	8.75 222	3.25 83	12.8 5.8
3 ½ 90	4.000 101.6	7.00 (sw) 178	7.0 3.2	4.00 (sw) 102	5.5 2.5	5.50 (sw) 140	12.5 5.7	10.00 254	3.50 89	20.0 9.1
4 100	4.500 114.3	7.75 (sw) 197	9.9 4.5	4.25 (sw) 108	7.0 3.2	5.00 127	11.9 5.4	10.75 263	3.75 95	19.0 8.6
5 125	5.563 141.3	9.50 241	20.4 9.3	5.13 (sw) 130	18.0 8.2	6.88 (sw) 175	17.1 7.8	12.75 324	4.00 102	30.0 13.6
6 150	6.625 168.3	6.50 165	20.4 9.3	3.50 89	11.9 5.4	6.50 165	29.5 13.3	14.00 356	4.50 114	43.3 19.6
8 200	8.625 219.1	10.00 (sw) 254	42.0 19.1	6.00 (sw) 152	28.5 12.9	10.00 (sw) 254	71.5 32.4	18.00 457	6.00 152	92.0 41.7
10 250	10.750 273.0	11.50 (sw) 292	50.0 22.7	6.50 (sw) 165	41.0 18.6	11.50 (sw) 292	116.0 52.6	20.75 527	6.50 165	106.0 48.1
12 300	12.750 323.9	13.50 (sw) 343	156.0 70.8	7.00 (sw) 178	57.8 26.2	13.50 (sw) 343	120.0 54.4	24.50 622	7.00 178	167.0 75.8

(sw) = Segmentally welded steel

No. 25P

Reducing Tee




No.25P Reducing Tee													
Size Nominal Inches mm				C to E Inches mm	Aprx. Weight Lbs kg	Size Nominal Inches mm				C to E Inches mm	Aprx. Weight Lbs kg		
1½ 40	×	1½ 40	×	1 25	4.00 102	2.2 1.0	6 150	×	6 150	×	4 100	7.63 194	26.2 11.9
2 50	×	2 50	×	1 25	4.25 108	2.9 1.3	8 200	×	8 200	×	2 50	10.00 254	42.0 15.2
				1½ 40	4.25 108	3.1 1.4					3 80	10.00 254	44.0 20.0
3 80	×	3 80	×	1 25	5.13 130	6.7 3.0					4 100	10.00 254	46.0 20.9
				1½ 40	5.13 130	6.9 3.1					5 125	10.00 254	48.0 21.8
				2 50	5.13 130	7.1 3.2					6 150	10.00 254	50.0 22.7
4 100	×	4 100	×	1 25	5.88 149	10.9 4.9	10 250	×	10 250	×	4 100	11.50 292	74.0 33.6
				1½ 40	5.88 149	11.1 5.0					6 150	11.50 292	78.0 35.4
				2 50	5.88 149	11.3 5.1					8 200	11.50 292	86.0 39.0
				2½ 65	5.88 149	11.6 5.3	12 300	×	12 300	×	6 150	13.50 343	112.0 50.8
				3 80	5.88 149	11.9 5.4					8 200	13.50 343	118.0 53.5
6 150	×	6 150	×	2 50	7.63 194	24.7 11.2					10 250	13.50 343	130.0 59.0
				3 80	7.63 194	25.4 11.5							

Plain End Fittings


STYLE 99

DIMENSIONS


Plain End Fittings



No. 33P



No. 35P




No. 61P

Fitting Size		No. 33P (sw) 90° Wye			No. 35P (sw) Cross		No. 61P Steel Bull Plug
Nominal Size Inches mm	Actual Out. Dia. Inches mm	C to LE Inches mm	C to SE Inches mm	Aprx. Weight Lbs kg	C to E Inches mm	Aprx. Weight Lbs kg	C to LE In./mm
1 25	1.315 33.7	3.25 83	2.25 57	1.1 0.5	3.25 83	1.7 0.8	3.00 76
1 ½ 40	1.900 48.3	4.00 102	2.75 70	1.8 0.8	4.00 102	3.5 1.6	3.50 89
2 50	2.375 60.3	4.25 108	2.75 70	2.9 1.3	4.25 108	5.2 2.4	4.00 102
2 ½ 65	2.875 73.0	4.75 121	3.00 76	9.0 4.1	4.75 121	5.4 2.4	5.00 127
3 80	3.500 88.9	5.13 130	3.25 83	8.5 3.9	5.13 130	8.5 3.9	6.00 152
3 ½ 90	4.000 101.6	5.50 140	3.50 89	10.0 4.5	5.50 140	9.0 4.1	6.50 165
4 100	4.500 114.3	5.88 149	3.75 95	14.0 6.4	5.88 149	10.8 4.9	7.00 178
5 125	5.563 141.3	6.88 175	4.00 102	21.6 9.8	6.88 175	20.0 9.1	8.50 216
6 150	6.625 168.3	7.63 194	4.50 114	31.2 14.2	7.63 194	30.0 13.6	10.00 254
8 200	8.625 219.1	10.00 254	6.00 152	36.0 16.3	10.00 254	66.4 30.1	11.0 279
10 250	10.750 273.0	11.50 292	6.50 165	52.0 23.6	11.50 292	103.0 46.7	13.00 330
12 300	12.750 323.9	13.50 343	7.00 178	81.2 36.8	13.50 343	158.0 71.7	14.00 356

(sw) = Segmentally welded steel

No.53P

Swaged Nipple




No.53P Swaged Nipple														
Size Nominal Inches mm			E to E Inches mm	Aprx. Weight Lbs kg	Size Nominal Inches mm			E to E Inches mm	Aprx. Weight Lbs kg	Size Nominal Inches mm			E to E Inches mm	Aprx. Weight Lbs kg
1½ 40	×	1 25	4.50 114	1.2 0.6	4 100	×	2 50	9.00 229	7.5 3.4	6 150	×	4 100	12.00 305	17.0 7.7
2 50	×	1 25	6.50 165	2.0 0.9		2½ 65	9.00 229	7.5 3.4	5 125		12.00 305	17.0 7.7		
		1 ½ 40	6.50 165	2.0 0.9			3 80	9.00 229	7.5 3.4		3 80	13.00 330	29.0 13.2	
2½ 65	×	1 25	7.00 178	3.0 1.4		3½ 90	9.00 229	7.5 3.4	4 100		13.00 330	29.0 13.2		
		1½ 40	7.00 178	3.0 1.4	5 125		×	2 50	11.00 279	11.5 5.2	5 125	13.00 330	29.0 13.2	
		2 50	7.00 178	7.1 3.2			3 80	11.00 279	11.5 5.2	6 150	13.00 330	48.0 21.8		
			1 25	8.00 203			4.5 2.0	6 150	×	1 25	12.00 305	16.0 7.3	10 250	×
3 80	×	1 ½ 40	8.00 203	4.5 2.0	1½ 40	12.00 305	16.0 7.3		4 100	15.00 381	48.0 21.8			
		2 50	8.00 203	4.5 2.0	2 50	12.00 305	17.0 7.7		6 150	15.00 381	48.0 21.8			
		2 ½ 65	8.00 203	4.5 2.0	2 50	12.00 305	17.0 7.7		8 200	15.00 381	48.0 21.8			
3½ 90	×	3 80	8.00 203	6.8 3.1	12 300	×	2½ 65	12.00 305	17.0 7.7	6 150	6 150	16.00 406	59.0 26.8	
4 100	×	1 25	9.00 229	7.5 3.4			3 80	12.00 305	17.0 7.7		8 200	16.00 406	59.0 26.8	
		1½ 40	9.00 229	7.5 3.4			3½ 90	12.00 305	17.0 7.7		10 250	16.00 406	59.0 26.8	

Plain End Fittings

STYLE 99

Adapter Nipples




Fitting Size		E to E In./mm	Aprx. Weight Lbs kg	Fitting Size		E to E In./mm	Aprx. Weight Lbs kg
Nominal Size Inches mm	Actual Out. Dia. Inches mm			Nominal Size Inches mm	Actual Out. Dia. Inches mm		
1	1.315	3.00	0.9	3	3.500	4.00	2.5
25	33.7	76	0.4	80	88.9	102	1.1
1 ½	1.900	4.00	0.9	4	4.500	6.00	5.4
2	48.3	102	0.4	100	114.3	152	2.5
2	2.375	4.00	1.2	6	6.625	6.00	9.4
50	60.3	102	0.5	150	168.3	152	4.3
2 ½	2.875	4.00	1.9				
65	73.0	102	0.9				

Plain End Fittings


STYLE 99

DIMENSIONS

Plain End Fittings




No. 10P




No. 11P

Fitting Size		90° Elbows		45° Elbows	
Nominal Size Inches mm	Actual Out. Dia. Inches mm	No. 10P Seg. Welded Steel		No. 11P Seg. Welded Steel	
		C to E Inches mm	Aprx. Weight Lbs kg	C to E Inches mm	Aprx. Weight Lbs kg
1 25	1.315 33.7	3.25 83	0.9 0.4	2.63 67	0.8 0.4
1 ½ 40	1.900 48.3	4.00 102	1.7 0.8	2.88 67	1.4 0.6
2 50	2.375 60.3	4.75 121	2.7 1.2	3.13 80	2.0 0.9
2 ½ 65	2.875 73.0	5.50 140	4.8 2.2	3.50 89	3.5 1.6
3 80	3.500 88.9	6.25 159	7.2 3.3	3.75 95	4.8 2.2
3 ½ 90	4.000 101.6	7.00 178	9.4 4.3	4.00 102	6.2 2.8
4 100	4.500 114.3	7.75 197	12.3 5.6	4.25 108	8.0 3.6
5 125	5.563 141.3	9.50 241	13.4 6.1	5.13 130	9.2 4.2
6 150	6.625 168.3	11.00 279	31.0 14.1	5.75 146	18.5 8.4
165.1 mm	6.500 165.1	- -	- -	- -	- -
8 200	8.625 219.1	10.00 254	38.7 17.6	6.00 152	24.9 11.3
10 250	10.750 273.0	11.50 292	52.1 23.6	6.50 159	32.8 14.9
12 300	12.750 323.9	13.50 343	76.7 34.8	7.00 178	47.5 21.6

Long Radius Elbows



No. 100P



No. 110P

Fitting Size		No. 100P 90° Long Radius Elbow		No. 110P 45° Long Radius Elbow	
Nominal Size Inches mm	Actual Out. Dia. Inches mm	C to E Inches mm	Aprx. Weight Lbs kg	C to E Inches mm	Aprx. Weight Lbs kg
2 50	2.375 60.3	4.75 121	2.5 1.1	3.13 80	1.8 0.8
2 ½ 65	2.875 73.0	5.50 140	4.0 1.8	3.50 89	2.5 1.1
3 80	3.500 88.9	6.25 159	6.5 3.0	3.75 95	4.5 2.0
4 100	4.500 114.3	8.00 203	11.5 5.2	4.50 114	7.5 3.4
6 150	6.625 168.3	11.13 283	28.5 12.9	5.88 149	17.3 7.9
8 200	8.625 219.1	14.13 359	56.7 25.7	7.13 181	24.0 15.4
10 250	10.750 273.0	17.13 435	96.5 43.8	8.38 213	57.0 25.9
12 300	12.750 323.9	20.13 511	145.0 65.8	9.63 245	95.0 43.1

Plain End Fittings

STYLE 99

INSTALLATION

Reference should always be made to the I-100 Victaulic Field Installation Handbook for the product you are installing. Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

WARRANTY

Refer to the Warranty section of the current Price List or contact Victaulic for details.

NOTE

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

For complete contact information, visit www.victaulic.com

14.04 18884 REV F UPDATED 05/2011

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2011 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

14.04

