

Victaulic® Flange Adapter for Polyethylene-to-Flanged Pipe Style 904



1.0 PRODUCT DESCRIPTION

Available Sizes

- 3 – 8" IPS high-density polyethylene to 3 – 8" IPS ANSI Class 150 Flange

Pipe Material

- HDPE pipe conforming to ASTM D3035 and ASTM F714
- PE-RT pipe conforming to ASTM D3350, cell class PE445574C, ASTM F2619, and ASTM F714 (SDR 7 – 26)
- See [Publication 36.01](#) for information on cross-linked polyethylene (PE-Xa) pipe.
- Contact Victaulic for other pipe materials.

Maximum Working Pressure

- Meets or exceeds the pressure rating of the pipe in accordance with the specifications and limitations in [Section 5.0](#) of this document.

Operating Temperature

- Dependent upon pipe manufacturer rating and gasket selection
- Reference [Section 3.0](#) for gasket performance options
- Consult pipe manufacturer for pipe material performance limitations.
- When using the Style 904 on PE-RT pipe applications the maximum operating temperature of the system should not exceed 140°F/60°C.

Function

- Provides a single transition from plain end HDPE pipe to ANSI Class 150, metallic and non-metallic flanged piping system components
- Utilizes patented Installation-Ready™ technology to eliminate loose parts

Pipe Preparation

- For use on plain end HDPE or PE-RT pipe

2.0 CERTIFICATIONS/LISTINGS

Product manufactured by Victaulic and/or certified suppliers in accordance with ISO-9001.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

3.0 SPECIFICATIONS – MATERIAL

Housing: Ductile iron conforming to ASTM A 536, Grade 65–45–12

Housing Coating: (specify choice)

- ☐ Orange Coating
- ☐ Liquid Bonded Epoxy
- ☐ Fusion Bonded Epoxy, Galvanized and other coatings are available. Contact Victaulic for details.

Retaining Ring: Type 316 Stainless Steel

HDPE Flange Stub Insert: (specify choice)

- ☐ **SDR 11**
Plastic Pipe Institute (PPI) listed high-density polyethylene PE100/PE4710
- ☐ **SDR 17**
Plastic Pipe Institute (PPI) listed high-density polyethylene PE100/PE4710

Coupling Gasket: (specify choice¹)

- ☐ **Grade “T” Nitrile**
Nitrile (Orange color code). Temperature range –20°F to +180°F/–29°C to +82°C. May be specified for oil related services, including air with oil vapor, this gasket may be specified for temperatures rated up to +180°F/+82°C. For water related services, this gasket may be specified for temperatures rated up to +150°F/+66°C. For oil free, dry air services, this gasket may be specified for temperatures rated up to +140°F/+60°C.
NOT COMPATIBLE FOR USE WITH HOT WATER SERVICES OR STEAM SERVICES.
- ☐ **Grade “E” EPDM**
EPDM (Green color code). Temperature range –30°F to +230°F/–34°C to +110°C. May be specified for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. UL Classified in accordance with NSF/ANSI/CAN 61 for cold +73°F/+23°C and hot +180°F/+82°C potable water service and NSF/ANSI/CAN 372. NOT COMPATIBLE FOR USE WITH PETROLEUM SERVICES OR STEAM SERVICES.
- ☐ **Grade “O” Fluoroelastomer**
Fluoroelastomer (Blue Stripe color code). Temperature range +20°F to +300°F/–34°C to +110°C. May be specified for many oxidizing acids, petroleum oils, halogenated hydrocarbons, lubricants, hydraulic fluids, organic liquids and air with hydrocarbons. NOT COMPATIBLE FOR USE WITH HOT WATER SERVICES OR STEAM SERVICES.

¹ Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to the latest [Victaulic Seal Selection Guide](#) for specific gasket service guidelines and for a listing of services which are not compatible.

NOTE

- The maximum temperature ratings shown exceed the temperature ratings for HDPE pipe. Consult individual pipe manufacturers for specific temperature limits.

Hardware:


Draw Bolts/Nuts: (specify choice²)

- ☐ Standard: Carbon steel oval neck track bolts meeting the mechanical property requirements of (imperial) ASTM A449 or (metric) ISO 898–1 Class 9.8 (M10–M16) or Class 8.8 (M20 and greater). Carbon steel hex nuts meeting the mechanical property requirements of (imperial heavy hex nuts) ASTM A563 Grade B or (metric hex nuts) ASTM A563M Class 9. Track bolts and hex nuts are zinc electroplated per ASTM B633 Fe/Zn5, finish (imperial) Type III or (metric) Type II, with fluoropolymer top coat. Hardened steel washers conforming to ASTM F436 Type 3 (weathering steel).
- ☐ 3 – 4": Stainless steel oval neck track bolts meeting the mechanical property requirements of ASTM F593, Group 2 (316 stainless steel), condition CW. Stainless steel heavy hex nuts meeting the mechanical property requirements of ASTM F594, Group 2 (316 stainless steel), condition CW, with galling reducing coating. Stainless steel washers conforming to ASME B18.21.1 and ASTM A666, Type 316, Annealed.
- ☐ 6 – 8": Stainless steel oval neck track bolts meeting the mechanical property requirements of ASTM A193 Class 2, Grade B8M. Stainless steel heavy hex nuts meeting the mechanical property requirements of ASTM A194 Grade 8M Heavy Hex, with galling reducing coating. Stainless steel washers conforming to ASME B18.21.1 and ASTM A666, Type 316, Annealed.

² Optional bolts/nuts available in imperial size only

4.0 DIMENSIONS

Style 904 – IPS Standard

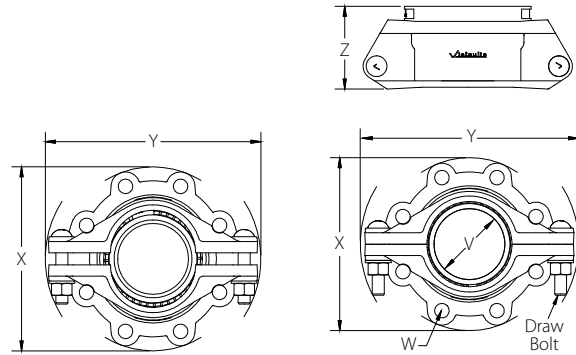

Style 904 Pre-Assembled

Style 904 Assembled

IPS Size		Draw Bolt/Nut ³		Assembly Bolt/Nut ⁴		Dimensions								Weight
Nominal inches	Actual Outside Diameter inches mm	Qty.	Size inches mm	Qty.	Size inches mm	Pre-Assembled		Assembled						Approx. (Each) lb kg
						X inches mm	Y inches mm	Stub Insert SDR	V ⁵ inches mm	W inches mm	X inches mm	Y inches mm	Z inches mm	
3	3.500 88.9	2	5/8 × 3 1/2 M16 × 89	4	5/8 M16	8.13 207	8.88 226	11	2.75 70	6.00 152	7.63 194	8.88 226	3.88 99	10.2 4.6
								17	3.00 76					
4	4.500 114.3	2	5/8 × 3 1/2 M16 × 89	8	5/8 M16	9.75 248	11.38 289	11	3.53 90	7.50 191	9.13 232	11.25 286	4.50 114	16.1 7.3
								17	3.84 98					
6	6.625 168.3	2	3/4 × 5 M20 × 127	8	3/4 M20	11.88 302	14.62 371	11	5.22 133	9.50 241	14.31 363	14.13 359	4.88 124	23.6 10.7
								17	5.72 145					
8	8.625 219.1	2	3/4 × 6 1/4 M20 × 159	8	3/4 M20	14.50 368	16.75 425	11	6.81 173	11.75 298	13.63 346	17.25 438	5.38 137	31.9 14.5
								17	7.44 189					

³ Supplied with Vic-Flange Adapter.

⁴ Total assembly bolt required to be supplied by installer.

⁵ When mating Style 904 Flange Adapters to Butterfly Valves, verify that the inside diameter of the stub insert (dimension V) will allow full opening.

5.0 PERFORMANCE

Style 904 – IPS Standard

Pressure Rating: joints made with Style 904 flange adapter meet the pressure rating of the HDPE pipe.

IPS Size	PE4710 HDPE Pipe ⁶						
	DR						
Nominal Size inches	7	9	11	13.5	17	21	26
	Pressure Rating						
	psi kPa						
3 – 4	285* 1965*	250 1725	200 1380	160 1100	125 860	100 690	– –
6 – 8	285* 1965*	250 1725	200 1380	160 1100	125 860	100 690	80 550

⁶ HDPE Polyethylene pipe conforming to ASTM D3035 and F714 at 73°F/23°C. Reference plastic pipe manufacture data for derating factors at other temperatures.

* Maximum allowable pressure for ANSI Class 150 lb flange. Under no circumstances shall working pressure exceed 285 psi at any temperature. Elevated temperature derate estimates can assume 333 psi maximum working pressure for DR7 pipe at 73°F/23°C.

NOTE

- Victaulic coupling gaskets have been demonstrated to seal under full (29" of Hg/3.4 kPa [absolute]) vacuum requirements. Consult the specific HDPE pipe manufacturer for their recommended limitations regarding maximum vacuum as well as the effects of temperature and pipe ovality.

5.1 PERFORMANCE

Style 904 – IPS Standard

Allowable Tensile Load (ATL): joints made with Style 904 flange adapter can sustain tensile loads noted below.


IPS Size	Allowable Tensile Load ⁷						
	DR						
Nominal Size inches	7	9	11	13.5	17	21	26
	lb N						
3	5146	4151	3473	2882	2327	1906	–
	22891	18465	15449	12820	10351	8478	–
4	8507	6861	5741	4765	3846	3151	–
	37841	30519	25537	21196	17108	14016	–
6	18437	14871	12444	10327	8336	6829	5568
	82012	66150	55354	45937	37080	30377	24768
8	31200	25200	21100	17500	14100	11574	9438
	138785	112095	93857	77844	62720	51484	41982

⁷ Allowable tensile loads shown are for straight pulling for a maximum period of one half hour at ambient temperature (68°F/20°C).

5.2 PERFORMANCE

Style 904 – IPS Standard

Bend Radius: joints made with Style 904 flange adapter can sustain a bending radius as recommended by the Plastic Pipe Institute (PPI) in the Handbook of PE Pipe (2nd ed, Chapter 7, Table 4).

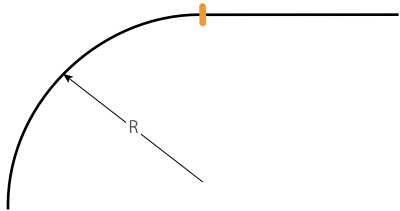

IPS Size	Minimum Recommended Bend Radius DR						
Nominal Size inches	7	9	11	13.5	17	21	26
	inches mm						
3	70 1778	70 1778	88 2235	88 2235	95 2413	95 2413	– –
4	90 2286	90 2286	113 2870	113 2870	122 3099	122 3099	– –
6	133 3378	133 3378	166 4216	166 4216	179 4547	179 4547	225 5715
8	173 4394	173 4394	216 5486	216 5486	233 5918	233 5918	293 7442

6.0 NOTIFICATIONS

⚠️ WARNING



- Read and understand all instructions before attempting to install, remove, adjust, or maintain any Victaulic piping products.
- Depressurize and drain the piping system before attempting to install, remove, adjust, or maintain any Victaulic piping products.
- Wear safety glasses, hardhat, and foot protection.

Failure to follow these instructions could result in death or serious personal injury and property damage.

7.0 REFERENCE MATERIALS

[I-900: Victaulic® High-Density Polyethylene \(HDPE\) Products Field Installation Handbook](#)
[IT-904: Victaulic Style 904 Flange Adapter for HDPE-to-Flanged Pipe Installation Instructions](#)
[05.01: Victaulic Seal Selection Guide](#)
[19.07: Victaulic Style 905 Coupling for Plain End HDPE Pipe](#)
[19.09: Victaulic Style 908 Coupling for Double Grooved HDPE Pipe](#)
[19.10: Victaulic Style 907 and W907 Transition Coupling for HDPE-to-Steel Pipe](#)
[19.11: Victaulic HDPE Plain End Fittings](#)
[29.01: Victaulic Terms and Conditions of Sale/Warranty](#)
[I-ENDCAP: Victaulic End Caps Installation Instructions](#)

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for determining the suitability of Victaulic products for their end-use application, in accordance with industry standards, project specifications, and Victaulic's published performance, maintenance, and safety data, as well as all warnings and installation instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, warranty, installation instructions, or this disclaimer.

Installation

Always refer to and follow the [Victaulic Installation Handbook](#) or installation instructions for the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at victaulic.com.

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Intellectual Property Rights

No statement concerning the use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its affiliates, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries. Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.

Note

All products bearing a Victaulic trademark are manufactured by Victaulic or to Victaulic specifications. All products are to be installed only in accordance with the applicable Victaulic installation instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.